

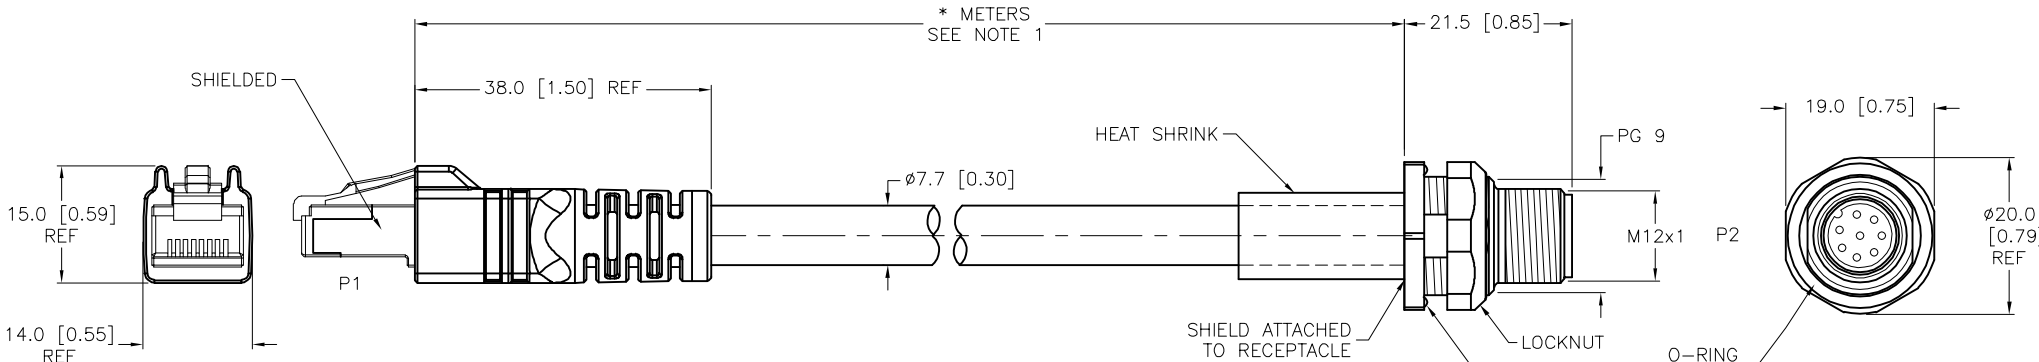





RJ45S END VIEW	MALE END VIEW	MOUNTING HOLE	SPECIFICATIONS	
 12345678 1 = WHITE/ORANGE (+TX) 2 = ORANGE (-TX) 3 = WHITE/GREEN (+RX) 4 = BLUE 5 = WHITE/BLUE 6 = GREEN (-RX) 7 = WHITE/BROWN 8 = BROWN <i>Ethernet</i>	 1 = WHITE/BLUE 2 = WHITE/BROWN 3 = BROWN 4 = ORANGE (-TX) 5 = WHITE/GREEN (+RX) 6 = WHITE/ORANGE (+TX) 7 = BLUE 8 = GREEN (-RX) <i>Ethernet</i>		CONTACT CARRIER MATERIAL (P2)	NYLON OR TPU
			CONTACT MATERIAL/PLATING (P2)	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING (P2)	BRASS/NICKEL
			CONTACT CARRIER MATERIAL/COLOR (P1)	POLYCARBONATE/CLEAR
			MOLDED HEAD MATERIAL/COLOR (P1)	TPU/BLACK
			CONTACT MATERIAL/PLATING (P1)	BRONZE/GOLD
			RATED CURRENT [A]	1.5 A
			RATED VOLTAGE [V]	42 V
			OUTER CABLE JACKET MATERIAL/COLOR	TPE/TEAL
			CONDUCTOR INSULATION MATERIAL	HDPE
			NUMBER OF CONDUCTORS [AWG]	4UTP×24 AWG, STRANDED
			SHIELDING	ALUM.-POLYESTER FOIL, TINNED-COPPER BRAIDED
			TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)
			PROTECTION CLASS	MEETS IEC IP67 (RJ45:IP20)
			MAX. PANEL THICKNESS	3.0 [0.12]

																																																											
<table border="1"><thead><tr><th colspan="2">"841" RAW CABLE SPECIFICATIONS</th></tr></thead><tbody><tr><td>CABLE PROPERTIES:</td><td>OIL, UV, WELD SLAG, AND ABRASION RESISTANT</td></tr><tr><td>VOLTAGE RATINGS (MAX):</td><td>600V</td></tr><tr><td>CATEGORY:</td><td>CAT 5e; (CABLE WILL MEET CAT 5e CHANNEL REQUIREMENTS TO 90M LENGTH)</td></tr><tr><td>POE COMPLIANT (802.3af):</td><td>UP TO 80M LENGTH WHEN INSTALLED PER RECOMMENDATIONS IN TIA TSB-184</td></tr><tr><td>FLEXLIFE:</td><td>10X CABLE OD MIN: 1 MILLION CYCLES (TICK TOCK) 20X CABLE OD MIN: 10 MILLION CYCLES (TICK TOCK)</td></tr><tr><td>TORSION TEST:</td><td>3 MILLION CYCLES (1lb LOAD, 360°-71 CYCLES/min)</td></tr><tr><td>C(UL)US CMX-OUTDOOR-CM LISTED, AWM RECOGNIZED</td><td></td></tr><tr><td>COMPLIANT WITH NEC ARTICLE 800 COMMUNICATIONS CABLES</td><td></td></tr><tr><td>APPROVALS:</td><td></td></tr></tbody></table>		"841" RAW CABLE SPECIFICATIONS		CABLE PROPERTIES:	OIL, UV, WELD SLAG, AND ABRASION RESISTANT	VOLTAGE RATINGS (MAX):	600V	CATEGORY:	CAT 5e; (CABLE WILL MEET CAT 5e CHANNEL REQUIREMENTS TO 90M LENGTH)	POE COMPLIANT (802.3af):	UP TO 80M LENGTH WHEN INSTALLED PER RECOMMENDATIONS IN TIA TSB-184	FLEXLIFE:	10X CABLE OD MIN: 1 MILLION CYCLES (TICK TOCK) 20X CABLE OD MIN: 10 MILLION CYCLES (TICK TOCK)	TORSION TEST:	3 MILLION CYCLES (1lb LOAD, 360°-71 CYCLES/min)	C(UL)US CMX-OUTDOOR-CM LISTED, AWM RECOGNIZED		COMPLIANT WITH NEC ARTICLE 800 COMMUNICATIONS CABLES		APPROVALS:																																							
"841" RAW CABLE SPECIFICATIONS																																																											
CABLE PROPERTIES:	OIL, UV, WELD SLAG, AND ABRASION RESISTANT																																																										
VOLTAGE RATINGS (MAX):	600V																																																										
CATEGORY:	CAT 5e; (CABLE WILL MEET CAT 5e CHANNEL REQUIREMENTS TO 90M LENGTH)																																																										
POE COMPLIANT (802.3af):	UP TO 80M LENGTH WHEN INSTALLED PER RECOMMENDATIONS IN TIA TSB-184																																																										
FLEXLIFE:	10X CABLE OD MIN: 1 MILLION CYCLES (TICK TOCK) 20X CABLE OD MIN: 10 MILLION CYCLES (TICK TOCK)																																																										
TORSION TEST:	3 MILLION CYCLES (1lb LOAD, 360°-71 CYCLES/min)																																																										
C(UL)US CMX-OUTDOOR-CM LISTED, AWM RECOGNIZED																																																											
COMPLIANT WITH NEC ARTICLE 800 COMMUNICATIONS CABLES																																																											
APPROVALS:																																																											
<table border="1"><thead><tr><th>CABLE LENGTH</th><th>TOLERANCE*</th></tr></thead><tbody><tr><td>ALL LENGTHS</td><td>+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER</td></tr><tr><th>STRIP LENGTH</th><th>TOLERANCE*</th></tr><tr><td>0-7mm</td><td>±0.5mm</td></tr><tr><td>8-29mm</td><td>±1.0mm</td></tr><tr><td>30-49mm</td><td>±2.0mm</td></tr><tr><td>50-69mm</td><td>±3.0mm</td></tr><tr><td>70-100mm</td><td>±4.0mm</td></tr><tr><td>OVER 100mm</td><td>±5.0mm</td></tr></tbody></table> * UNLESS OTHERWISE SPECIFIED		CABLE LENGTH	TOLERANCE*	ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER	STRIP LENGTH	TOLERANCE*	0-7mm	±0.5mm	8-29mm	±1.0mm	30-49mm	±2.0mm	50-69mm	±3.0mm	70-100mm	±4.0mm	OVER 100mm	±5.0mm																																								
CABLE LENGTH	TOLERANCE*																																																										
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER																																																										
STRIP LENGTH	TOLERANCE*																																																										
0-7mm	±0.5mm																																																										
8-29mm	±1.0mm																																																										
30-49mm	±2.0mm																																																										
50-69mm	±3.0mm																																																										
70-100mm	±4.0mm																																																										
OVER 100mm	±5.0mm																																																										
NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.																																																											
<table border="1"><thead><tr><th colspan="2">RELATED DOCUMENTS</th><th colspan="2">3RD ANGLE PROJECTION</th><th colspan="2">THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</th><th colspan="2">3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</th></tr></thead><tbody><tr><td colspan="2">1. 2. 3. 4.</td><td colspan="2" rowspan="2"></td><td colspan="2">DRFT RDS</td><td colspan="2">DATE 2/06/02</td></tr><tr><td colspan="2">MATERIAL</td><td colspan="2">APVD</td><td colspan="2">SCALE 1=1.0</td></tr><tr><td colspan="2">FINISH</td><td colspan="2" rowspan="2">ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY</td><td colspan="2">UNIT OF MEASUREMENT</td><td colspan="2">DESCRIPTION</td></tr><tr><td colspan="2"></td><td colspan="2">MILLIMETER [INCH]</td><td colspan="2">RJ45S FSSD 841-*M</td></tr><tr><td colspan="2"></td><td colspan="2" rowspan="2">CONTACT TURCK FOR MORE INFORMATION</td><td colspan="2"></td><td colspan="2">IDENTIFICATION NO.</td></tr><tr><td colspan="2"></td><td colspan="2"></td><td colspan="2">REV R</td></tr><tr><td colspan="2">DO NOT SCALE THIS DRAWING</td><td colspan="2"></td><td colspan="2">FILE: 777005962</td><td colspan="2">SHEET 1 OF 1</td></tr></tbody></table>		RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		1. 2. 3. 4.				DRFT RDS		DATE 2/06/02		MATERIAL		APVD		SCALE 1=1.0		FINISH		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT		DESCRIPTION				MILLIMETER [INCH]		RJ45S FSSD 841-*M				CONTACT TURCK FOR MORE INFORMATION				IDENTIFICATION NO.						REV R		DO NOT SCALE THIS DRAWING				FILE: 777005962		SHEET 1 OF 1	
RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us																																																					
1. 2. 3. 4.				DRFT RDS		DATE 2/06/02																																																					
MATERIAL				APVD		SCALE 1=1.0																																																					
FINISH		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT		DESCRIPTION																																																					
				MILLIMETER [INCH]		RJ45S FSSD 841-*M																																																					
		CONTACT TURCK FOR MORE INFORMATION				IDENTIFICATION NO.																																																					
						REV R																																																					
DO NOT SCALE THIS DRAWING				FILE: 777005962		SHEET 1 OF 1																																																					
<table border="1"><thead><tr><th>R</th><th>REMOVE P2 OVERMOLD</th><th>KB</th><th>12/03/24</th><th>500000010753</th></tr></thead><tbody><tr><td>REV</td><td>DESCRIPTION</td><td>BY</td><td>DATE</td><td>ECO NO.</td></tr></tbody></table>		R	REMOVE P2 OVERMOLD	KB	12/03/24	500000010753	REV	DESCRIPTION	BY	DATE	ECO NO.																																																
R	REMOVE P2 OVERMOLD	KB	12/03/24	500000010753																																																							
REV	DESCRIPTION	BY	DATE	ECO NO.																																																							