


FW-EWKPM0414-PS-S-0608 可现场接线的接插件 - M12电源 母头接插件,M12×1,弯式





货号100044192接插件A母头接插件, M12 ×针脚数量3+PE触点CuZn, 镀金	1, 弯角, S型
针脚数量 3+PE	1, 弯角, S型
—	
714/\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	
触点夹紧 塑料, PA, 黑色	
拧接把手 塑料, 黑色	
连接螺母/螺钉 镀锌膜, GD-Zn, 镀锌	· 泉
Seal 塑料, FPM/FKM	
线缆外径 68 mm	
导线横截面/夹紧能力 0.752.5 mm ²	
连接方式	
机械寿命 > 100 插接次数	
保护类型 IP67, (拧在一起)	
电气性能@20°C	
额定工作电压 630 V	
电流 12 A	
机械和化学性能	
环境温度(固定) -40+85 ℃	
认证 通过cULus认证	

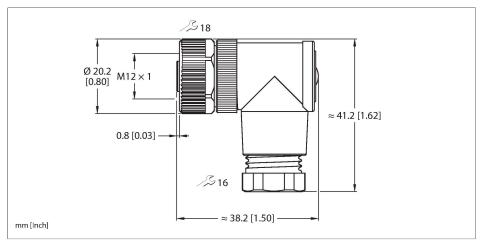

特点









- ■S型
- ■金属连接螺母
- ■螺旋夹端子
- ■4针(3+PE)
- ■线缆引线:6.0...8.0 mm
- ■接线柱可容面积:
- ■最大1.5 mm²或16 AWG(带线缆终端护
- 套) ■最大2.5 mm²或14 AWG(不带线缆终端护 套)

触点分配





下降曲线

