



piconet rozšiřovací moduly pro IP-Link 8x digitální výstup 2 A (celkem 4 A) SNNE-0008D-0002

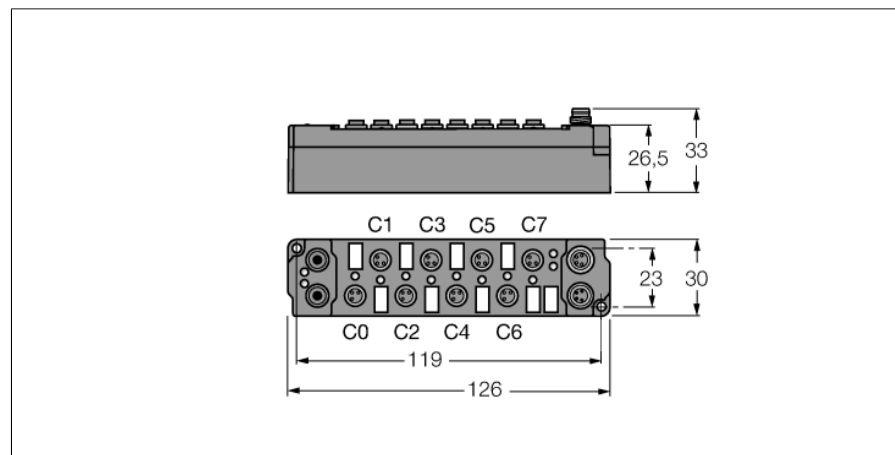


- přímé připojení IP-Link
- pouzdro vyztužené skleněnými vlákny
- zalitá elektronika
- kovové konektory
- stupeň krytí IP67

Výstup M8 x 1



Napájení M8 x 1



$$I_{Bmax} = I_{Lmax} = 4 \text{ A}$$

Typ	SNNE-0008D-0002
ID č.	6824179
Počet kanálů	8
Napětí provozní/při zatížení	20...29 VDC
Provozní proud	≤ 25 mA
Délka LWL	≤ 15 m
Počet kanálů	8x digitální výstup dle EN 61131-2
Výstupní napětí	20...29 VDC z napájení zátěže
Výstupní proud na kanál	2 A (Σ 4 A), odolnost vůči zkratu
Typ zátěže	odporová, indukční, světelná
Frekvence spínání	≤ 500 Hz
Faktor zátěže	0.25
Rozměry	30 x 126 x 26.5 mm
Odolnost vůči vibracím	dle EN 60068-2-6
Odolnost vůči rázům	dle EN 60068-2-27
Elektromagnetická kompatibilita (EMC)	dle EN 61000-6-2/EN 61000-6-4
Stupeň krytí	IP67
Certifikáty	CE, cULus

Procesní data

		Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PROFIBUS-DP coupling module: "Byte alignment" is disabled (default) and byte n has been used halfway. DeviceNet™, CANopen, INTERBUS, Ethernet coupling module: Byte n has been used halfway. Up to 8 bit user data are mapped.	Output	Byte n (M8)	C3P4	C2P4	C1P4	C0P4	is used by the physically preceding bit-oriented extension module connected via the IP Link.		
		Byte n (M12)	C1P2	C1P4	C0P2	C0P4			
		Byte n+1 (M8)	is used by the physically following bit-oriented extension module connected via the IP Link.			C7P4	C6P4	C5P4	C4P4
		Byte n+1 (M12)				C3P2	C3P4	C2P2	C2P4
PROFIBUS-DP coupling module: "Byte alignment" is disabled (default) and the previous byte has been completely used or "byte alignment" is active. DeviceNet™, CANopen, INTERBUS, Ethernet coupling module: The previous byte has been completely used. Up to 8 bit user data are mapped.	Output	Byte n (M8)	C7P4	C6P4	C5P4	C4P4	C3P4	C2P4	C1P4
		Byte n (M12)	C3P2	C3P4	C2P2	C2P4	C1P2	C1P4	C0P2
		C... = Connector no. – P... = Pin no.							