



piconet rozšiřovací moduly pro IP-Link 8x digitální PNP vstup, filtr 3 ms 8x digitální výstup 0,5 A SNNE-0808D-0003

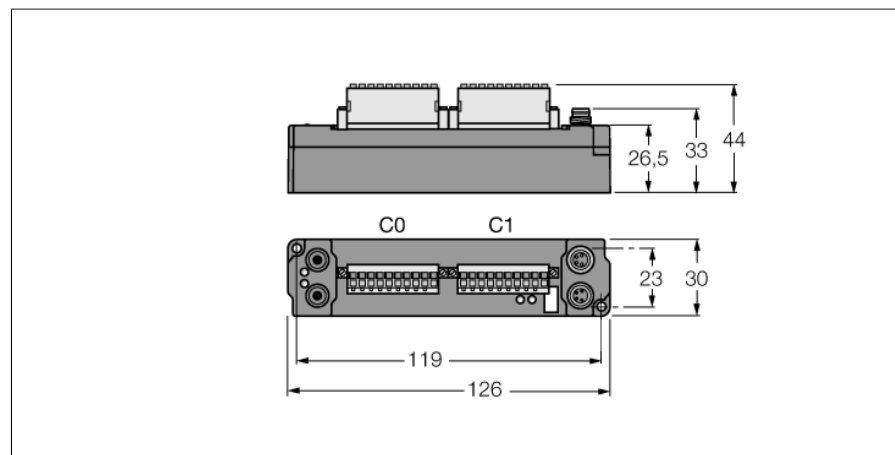


Typ	SNNE-0808D-0003
ID č.	6824473
Počet kanálů	16
Napětí provozní/při zatížení	20...29 VDC
Provozní proud	≤ 25 mA
Délka LWL	≤ 15 m
Počet kanálů	8x digitální vstup dle EN 61131-2
Vstupní napětí	20...29 VDC z napájecího napětí
Napětí signálu nízké úrovně	-3 až 5 VDC (EN 61131-2, Typ 2)
Napětí vysoké úrovně signálu	11 až 30 VDC (EN 61131-2, Typ 2)
Vstupní filtr	3 ms
Max.vstupní proud	6 mA
Počet kanálů	8x digitální výstup dle EN 61131-2
Výstupní napětí	20...29 VDC z napájení zátěže
Výstupní proud na kanál	0,5 A, zkratzdorný
Typ zátěže	odporová, indukční, světelná
Frekvence spínání	≤ 500 Hz
Faktor zátěže	1
Rozměry	30 x 126 x 26,5 mm
Odolnost vůči vibracím	dle EN 60068-2-6
Odolnost vůči rázům	dle EN 60068-2-27
Elektromagnetická kompatibilita (EMC)	dle EN 61000-6-2/EN 61000-6-4
Stupeň krytí	IP67
Certifikáty	CE, cULus

- přímé připojení na IP link
- IP20 pružinové svorky
- pouzdro vyztužené skleněnými vlákny
- zalitá elektronika
- kovové konektory
- stupeň krytí IP20


vstup svorka IP20

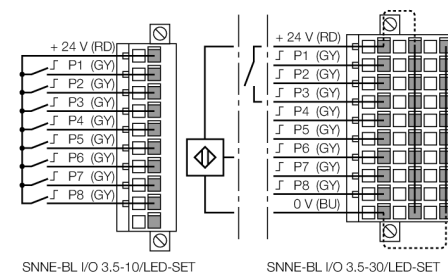

výstup svorka IP20

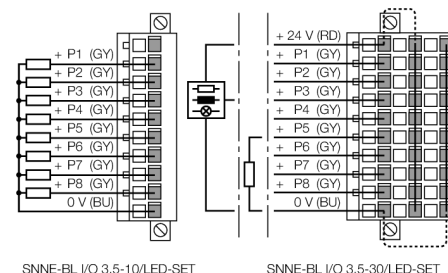

Napájení M8 x 1



LED

	LED designation	Status green	Status red	Function
IP-Link / module status	RUN / ERR (I/O)	flickers/ON	OFF	Receiving error-free IP-Link protocols
		flickers	flickers	Receiving faulty IP-Link protocols
		OFF	flickers	Receiving faulty IP-Link protocols / system fault
		OFF	ON	No receipt of IP-Link protocols / module error
Inputs	1...8	OFF		Input inactive (not dampened)
		ON		Input active (dampened)
Outputs	1...8	OFF		Output inactive (not switched)
		ON		Output active (switched)
Power supply	U _B	OFF		Operating voltage U _B < 18 VDC
		ON		Operating voltage U _B ≥ 18 VDC
	U _L	OFF		Load voltage U _L < 18 VDC
		ON		Load voltage U _L ≥ 18 VDC

Procesní data

			Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PROFIBUS-DP coupling module: "Byte alignment" is disabled (default) and the previous byte has been used halfway. DeviceNet™, CANopen, INTERBUS, Ethernet coupling module: Byte n has been used halfway. Up to 8 bit input data and output data each are mapped.	Input	Byte n	C0P4	C0P3	C0P2	C0P1	is used by the physically preceding bit-oriented extension module connected via the IP Link.			
	Output	Byte n	C1P4	C1P3	C1P2	C1P1				
	Input	Byte n+1	is used by the physically following bit-oriented extension module connected via the IP Link.				C0P8	C0P7	C0P6	C0P5
	Output	Byte n+1					C1P8	C1P7	C1P6	C1P5
PROFIBUS-DP coupling module: "Byte alignment" is disabled (default) and the previous byte has been completely used or "byte alignment" is activated. DeviceNet™, CANopen, INTERBUS, Ethernet coupling module: The previous byte has been completely used. Up to 8 bit input data and output data each are mapped.	Input	Byte n	C0P8	C0P7	C0P6	C0P5	C0P4	C0P3	C0P2	C0P1
	Output	Byte n	C1P8	C1P7	C1P6	C1P5	C1P4	C1P3	C1P2	C1P1
			C... = Connector no. – P... = Pin no.							

příslušenství

Type	Ident no.	housing	clamping point	clamping range	signal LEDs	degree of protection
SNNE-BL I/O 3,5-10/LED-SET	6824475	1-row	10	0,5...1,5 mm ²	yes	IP20
SNNE-BL I/O 3,5-30/LED-SET	6824474	3-row	30	0,5...1,5 mm ²	yes	IP20