


# Q40AW3FF600 W/30 Photoelectric Sensor – Diffuse Mode Sensor with Fixed-Field Background Suppression






| Туре                         | Q40AW3FF600 W/30                       |
|------------------------------|--|
| ID                           | 3033909                                |
| Optical data                 |  |
| Function                     | Proximity switch                       |
| Operating mode               | Background suppression, non-adjustable |
| Light type                   | IR                                     |
| Wavelength                   | 880 nm                                 |
| Range                        | 0600 mm                                |
| Electrical data              |  |
| Operating voltage            | 20250 VAC                              |
| AC rated operational current | ≤ 200 mA                               |
| Output function              | Light operation, Relay output          |
| Switching frequency          | ≤ 40 Hz                                |
| Readiness delay              | ≤ 100 ms                               |
| Response time typical        | < 16 ms                                |
| Mechanical data              |  |
| Design                       | Rectangular, Q40                       |
| Dimensions                   | Ø 30 x 46 x 40.1 x 69.8 mm             |
| Housing material             | Plastic, Thermoplastic material        |
| Lens                         | plastic, Polycarbonate                 |
| Electrical connection        | Cable, 9 m, PVC                        |
| Number of cores              | 3                                      |
| Core cross-section           | 0.5 mm <sup>2</sup>                    |
| Ambient temperature          | -40+70 °C                              |
| Protection class             | IP67                                   |
| Special features             | Encapsulated                           |

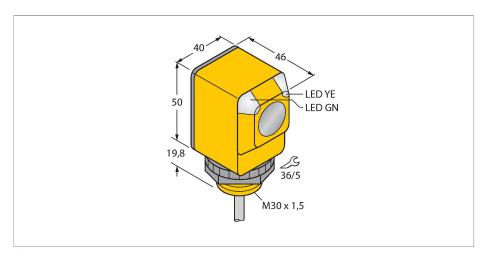

#### **Features**

- Cable, 2 m
- ■Protection class IP67
- ■Ambient temperature: -40...+70 °C

#### Wiring diagram




## Functional principle

The emitter and receiver are incorporated in a single housing. The light reflection of the target is detected and triggers the sensor to switch. Thus the switching distance largely depends on the reflectivity of the target.

Excess gain curve

Excess gain in relation to the distance

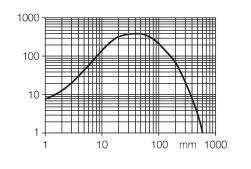




## Technical data

| Power-on indication    | LED, Green                                |
|------------------------|---|
| Switching state        | LED, Yellow                               |
| Excess gain indication | LED                                       |
| Tests/approvals        |   |
| MTTF                   | 448 years acc. to SN 29500 (Ed. 99) 40 °C |
| Approvals              | CE, UL, CSA                               |

### Accessories



Mounting bracket, rectangular, stainless steel, for sensors with 30mm thread


3032723




Mounting bracket, stainless steel, for M10 x 1.5 thread, thread length 30 mm

3011185

3073135



3052521 Mounting bracket, PBT black, for sensors with 30 mm thread, rotatable



Mounting bracket, stainless steel, for sensors with 30 mm thread