

Czujnik fotoelektryczny czujnik odbiciowy ze stałym odcięciem tła Q25RW3FF100 W/30



Typ	Q25RW3FF100 W/30
Nr kat.	3033863

Dane optyczne	
Funkcja	Przełącznik zbliżeniowy
Tryb pracy	Tłumienie tła, nieregulowane
Rodzaj światła	IR
Długość fali	880 nm
Zasięg	0...100 mm

Dane elektryczne	
Napięcie robocze U_a	20...250V AC
Nominalny prąd zasilania AC	≤ 200 mA
Funkcja wyjścia	zadziałanie "ciemno", Wyjście przekaźnikowe
Częstotliwość przełączania	≤ 40 Hz
Opóźnienie załączenia	≤ 100 ms
Typowy czas odpowiedzi	< 16 ms


Dane mechaniczne	
Wykonanie	Prostopadłościenny, Q25
Wymiary	Ø 18 x 30 x 25 x 50.2 mm
Materiał obudowy	Tworzywo sztuczne, Tworzywo termoplastyczne
Soczewka	tworzywo sztuczne, Akrylowy
Połączenie elektryczne	Kabel, 9 m, PVC
Liczba żył przewodu	3
Przekrój przewodu	0.5 mm ²
Temperatura pracy	-40...+70 °C
Stopień ochrony	IP69

Cechy szczególne	
	Odporność na środki chemiczne
	W obudowie
Wskaźnik napięcia zasilania	LED, zielony
Wskaźnik stanu przełączenia	LED, Żółty
Wskaźnik wzmacnienia	LED

Testy/aprobaty	
MTTF	448 rok/lata zgodnie z SN 29500 (Ed. 99) 40 °C
Certyfikaty	CE, UL, CSA

- Przewód 2 m
- Stopień ochrony IP67
- Temperatura otoczenia: -40...+70 °C

Schemat podłączenia

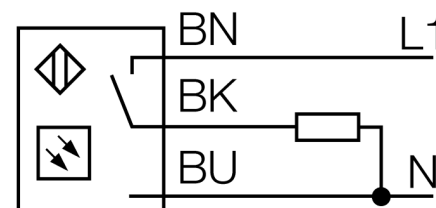

Zasada działania

The emitter and receiver are incorporated in a single housing. The light reflection of the target is detected and triggers the sensor to switch. Thus the switching distance largely depends on the reflectivity of the target.

Excess gain curve

Excess gain in relation to the distance

