



Modul de extensie piconet pentru IP-Link 4 intrări digitale PNP cu filtru 0.2 ms 4 ieșiri digitale 2 A SNNE-0404D-0006

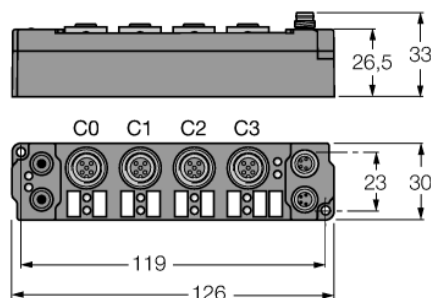


- Conexiune directă la IP link
- Carcasă armată cu fibră de sticlă
- Module încapsulate
- Conector metalic
- Grad de protecție IP67


M12 × 1 intrare



M12 × 1 Intrare



M8 × 1 Alimentare



Tip	SNNE-0404D-0006
Nr. ID	6824196
Număr de canale	8
Tensiune de alimentare / tensiune de sarcină	20...29 Vcc
Curent de alimentare	≤ 25 mA
Lungime fibră optică	≤ 15 m
Număr de canale	4 intrări digitale conform EN 61131-2
Tensiune de intrare	20...29 Vcc prin tensiunea de alimentare
Semnal de tensiune - nivel jos	-3...5 Vcc (EN 61131-2, tip 2)
Nivel de tensiune pentru semnal "High"	11...30 Vcc (EN 61131-2, tip 2)
Întârziere la intrare	0,2 ms
Curent maxim de intrare	6 mA
Număr de canale	4 ieșiri digitale conform EN 61131-2
Tensiune de ieșire	20...29 Vcc de la tensiunea de alimentare
Curent de ieșire pe canal	2 A (Σ 4 A), protejat la scurtcircuit
Tip de sarcină	rezistiv, inductiv, bec de sarcină
Frecvență de comutare	≤ 500 Hz
Simultaneity factor	0.5
Dimensiuni (l x L x h)	30 x 126 x 26.5 mm
Test vibrații	Conf. cu EN 60068-2-6
Test la șocuri mecanice	conform DIN EN 60068-2-27
Compatibilitate electromagnetică (interferențe)	Conf. cu EN 61000-6-2/EN 61000-6-4
Clasă de protecție	IP67
Certificări	CE, cULus

LED-uri

	LED designation	Status green	Status red	Function
IP-Link / module status	RUN / ERR (I/O)	flickers/ON	OFF	Receiving error-free IP-Link protocols
		flickers	flickers	Receiving faulty IP-Link protocols
		OFF	flickers	Receiving faulty IP-Link protocols / system fault
		OFF	ON	No receipt of IP-Link protocols / module error
Inputs	0...3	OFF		Input inactive (not dampened)
		ON		Input active (dampened)
Outputs	4...7	OFF		Output inactive (not switched)
		ON		Output active (switched)
Power supply	U _B	OFF		Operating voltage U _B < 18 VDC
		ON		Operating voltage U _B ≥ 18 VDC
	U _L	OFF		Load voltage U _L < 18 VDC
		ON		Load voltage U _L ≥ 18 VDC

Process image pentru date de intrare

			Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Coupling module parameter Byte alignment is "disabled" (default) and the previous byte has been completely used. 4 bit input data and output data each are mapped.	Input	Byte 0	Is used by the physically following bit-oriented extension module connected via the IP Link.				C1P2	C1P4	C0P2	C0P4
	Output	Byte 0					C3P2	C3P4	C2P2	C2P4
Coupling module parameter Byte alignment is "disabled" and the previous byte has been used halfway. 4 bit input data and output data each are mapped.	Input	Byte 0	C1P2	C1P4	C0P2	C0P4	Is used by the physically preceding bit-oriented extension module connected via the IP Link.			
	Output	Byte 0	C3P2	C3P4	C2P2	C2P4				
Coupling module parameter Byte alignment is activated. 1 byte input data and output data each are mapped.	Input	Byte 0	idle	idle	idle	idle	C1P2	C1P4	C0P2	C0P4
	Output	Byte 0	C3P2	C3P4	C2P2	C2P4	idle	idle	idle	idle

C... = Connector no., P... = Pin no.