


Q26PXLQP7

Photoelectric Sensor – Retroreflective Sensor with Polarizing Filter


For Clear Object Detection

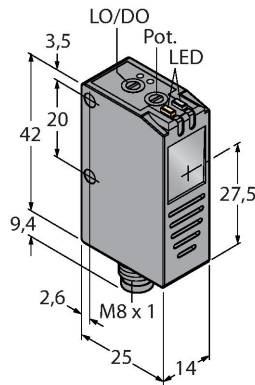

Features

- Male M8 × 1, 4-pin
- Protection class IP67
- Light or dark operation, adjustable
- Sensitivity adjusted via potentiometer
- Coaxial optics, reduced blind zone
- Operating voltage: 10...30 VDC
- PNP switching output
- Switching output for insufficient excess gain

Wiring diagram



Functional principle

The Q26 is a retroreflective sensor for the detection of light, transparent and also opaque objects. The sensor is perfectly suited for the detection of PET bottles, glass jars, reflecting surfaces, LCD glasses or even semiconductor wafers. In addition to a coaxial optics, the sensor is also equipped with an auxiliary output that switches when excess gain is outside the normal range. The sensitivity is adjusted via potentiometer, in order to distinguish green from transparent bottles for example. Light or dark operation is adjusted via rotary switch.

Technical data

Type	Q26PXLQP7
ID	3017129
Optical data	
Function	Retroreflective Sensor
Operating mode	Polarized (coaxial)
Light type	Red
Wavelength	660 nm
Range	5...800 mm
Electrical data	
Operating voltage	12...30 VDC
Residual ripple	< 10 % U _{ss}
No-load current	≤ 15 mA
Short-circuit protection	yes
Reverse polarity protection	yes
Output function	NO contact, dark operation, PNP
Switching frequency	4 kHz
Readiness delay	≤ 0 ms
Response time typical	< 0.25 ms
Setting option	Potentiometer
Mechanical data	
Design	Rectangular, Q26
Dimensions	25 x 14 x 42 mm
Housing material	Plastic, Thermoplastic material, Black
Lens	glass, Glass

Technical data


Electrical connection	Connector, M8 × 1, PVC
Number of cores	4
Ambient temperature	-10...+55 °C
Protection class	IP67
Special features	Clear object detection
Power-on indication	LED, Green
Switching state	LED, Yellow
Excess gain indication	LED
Tests/approvals	
Approvals	CE, cULus listed

Accessories

SMBLSTQ26	3019506	SMBLSTDQ26	3018180
Mounting bracket, stainless steel, for Q26		Mounting bracket, stainless steel, rectangular, for Q26	

Accessories

Dimension drawing	Type	ID	
	PKW4M-2/TEL	6625067	Connection cable, female M8, angled, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com

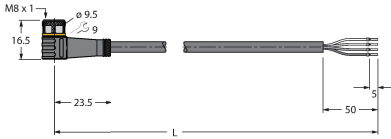

Accessories

Dimension drawing	Type	ID	
	BRT-60X40C	3044997	Rectangular reflector, reflection coefficient 1.48, material: acrylic, ambient temperature -20...+60 °C

