



LED Signal Light K80FLGRXPQ

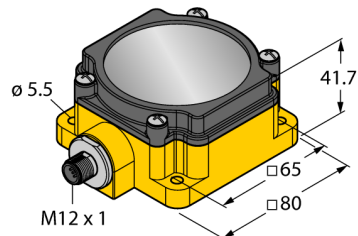

- M12 x 1 male, 4-pin
- Protection class IP67
- Multicolor: Green (COL 1) / Red (COL 2)
- Operating voltage 12...30 VDC
- Configuration via DIP switch
- Steady or alternate flashing, adjustable
- Two flashing frequencies, adjustable

Wiring Diagram

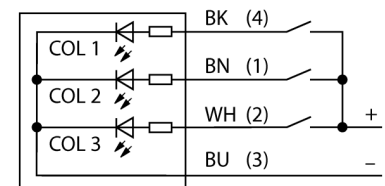

Type	K80FLGRXPQ
ID	3025276
Signal and display data	
Purpose	LED indicator light
Function	Spotlight
Light type	Green
	Red
Dimmable	No
Features of color 1	Green, Can be set via DIP switches
Features of color 2	Red, Can be set via DIP switches
Electrical data	
Operating voltage U_n	12...30 VDC
Max. current consumption per color	140 mA
Input type	PNP
Response time typical	< 10 ms
Mechanical data	
Cascadable	No
Design	Rectangular, K80FL
Housing material	Plastic, PC, Black
Window material	Acrylic, diffuse
Electrical connection	Connector, M12 x 1, PVC
Number of cores	4
Ambient temperature	-40...+50 °C
Protection class	IP67
Tests/approvals	
Approvals	CE

Accessories

Type code	Ident no.		Dimension drawing
SMBDX80DIN	3077161	Mounting panel for DIN rail, suited for CP80, DX80, K80, Q80, operating temperature: -20...90 °C	