



# LED Signal Light Tower Light TL50HGYRAOS3QP

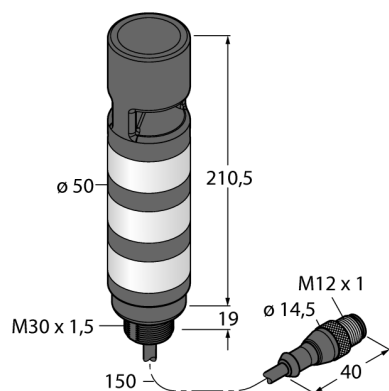

- Plastic housing, black
- EMI and RFI immune
- Protection class IP67
- Cable with male end M12 x 1, 150 mm
- Multicolor: Green (COL 1) / Yellow (COL 2) / Red (COL 3)
- Operating voltage: 18...30 VDC or 24 VAC with 45 mA per LED color
- Inputs: PNP/NPN
- Beeper: Omnidirectional, sealed, pulsed tone max. 99 dB

## Wiring Diagram

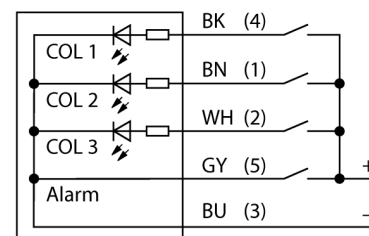

## Functional principle

The TL50H tower lights, in the high-brightness version, provide highly visible status indicators and a clear user guidance within the entire system. They can be assembled from various colored LEDs and are available with or without beeper. You can mount them directly on machines, in the cabinet or in monitoring locations of production lines.

The wiring diagram shows a PNP pin assignment.

There are 5 colors available, blue (B), green (G), red (R), yellow (Y) and white (W), which specify the light sequence from bottom to top in the type code of the tower light. Example: TL50GYRQ, colors green, yellow and red arranged from bottom to top.

|                                    |                                            |
|------------------------------------|--------------------------------------------|
| Type                               | TL50HGYRAOS3QP                             |
| ID                                 | 3074383                                    |
| Signal and display data            |                                            |
| Purpose                            | LED indicator light                        |
| Function                           | Tower light                                |
| Light type                         | Green<br>Yellow<br>Red                     |
| Dimmable                           | No                                         |
| Features of color 1                | Green, Permanently on, 60 lm               |
| Features of color 2                | Yellow, Permanently on, 23 lm              |
| Features of color 3                | Red, Permanently on, 32 lm                 |
| Acoustic signal                    | Pulsed, 99dB                               |
| Electrical data                    |                                            |
| Operating voltage $U_s$            | 18...30 VDC                                |
| DC rated operating current $I_s$   | ≤ 100 mA                                   |
| Operating voltage $U_s$            | 21...27VAC                                 |
| Max. current consumption per color | 100 mA                                     |
| Max. current consumption of beeper | 45 mA                                      |
| Input type                         | Bipolar (PNP/NPN)                          |
| Response time typical              | < 10 ms                                    |
| Mechanical data                    |                                            |
| Cascadable                         | No                                         |
| Design                             | Smooth barrel, TL50                        |
| Dimensions                         | Ø 50 x 229.6 mm                            |
| Housing material                   | Plastic, ABS, Black                        |
| Window material                    | Polycarbonate, diffuse                     |
| Electrical connection              | Cable with connector, M12 x 1, 0.15 m, PVC |
| Number of cores                    | 5                                          |
| Ambient temperature                | -20...+50 °C                               |
| Relative humidity                  | 0...95%                                    |
| Protection class                   | IP67                                       |
| Tests/approvals                    |                                            |
| Approvals                          | CE, UL listed                              |