



Image Processing Camera P3 PPROCAMS-R-P



- Compact camera with integrated ring light
- Housing material aluminium
- Plastic inspection window
- Protection class IP68
- Lens to be ordered separately
- Separate controller required, type PPROCTL
- 1/3" CCD, 640x480 pixels
- 256 gray scale values

Wiring Diagram

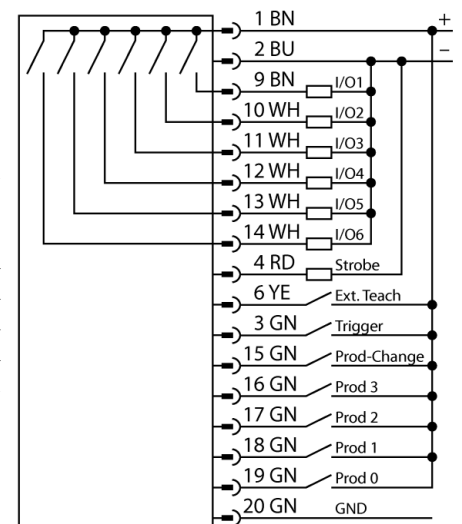

Functional principle

The image processing system PresencePLUS PRO consists of the compact camera and the processing unit incorporated in a separate controller. Lens, external/internal lighting and connection cable are to be ordered separately. Freeware and firmware updates are available for download on:

www.bannerengineering.com

Type	PPROCAMS-R-P
ID	3077027
Camera data	
Resolution	640 × 480 pixels
Light type	Red
Wavelength	620...630 nm
Brennweite	16 mm
Special features	Wash down
DC rated operating current I _e	
	≤ 650 mA
Communication protocol	
	EtherNet/IP
	Modbus TCP
	Modbus TCP
	PCCC
	RS232
Mechanical data	
Dimensions	Ø 104 x 143.3 mm
Housing material	Metal, Nickel-plated aluminum
Window material	Acrylic, clear
Ambient temperature	0...+50 °C
Protection class	IP68
Tests/approvals	
Approvals	CE