


Q20PD W/30 Photoelectric Sensor – Diffuse Mode Sensor



Technical data


Туре	Q20PD W/30
ID	3077785
Optical data	
Function	Proximity switch
Operating mode	Diffuse
Light type	Red
Wavelength	655 nm
Range	1250 mm
Electrical data	
Operating voltage	1030 VDC
Residual ripple	< 10 % U _{ss}
DC rated operational current	≤ 100 mA
No-load current	≤ 18 mA
Reverse polarity protection	yes
Output function	Complementary contact, PNP
Switching frequency	≤ 600 Hz
Readiness delay	≤ 100 ms
Response time typical	< 0.8 ms
Setting option	Potentiometer
Mechanical data	
Design	Rectangular, Q20
Dimensions	20 x 12 x 32 mm
Housing material	Plastic, Thermoplastic material
Lens	plastic, Acrylic
Electrical connection	Cable, 9 m, PVC
Number of cores	4
Core cross-section	0.35 mm ²

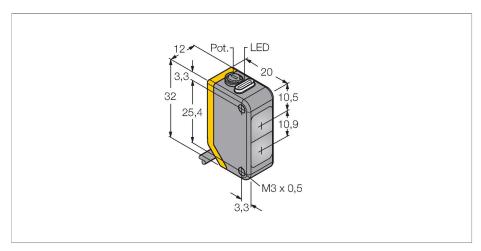

Features

- ■Cable, PVC, 9 m
- ■Protection class IP67
- ■LED all-round visible
- Sensitivity adjusted via potentiometer
- Operating voltage: 10...30 VDC
- ■PNP switching output, changeover

Wiring diagram



Functional principle

Identical to retro-reflective sensors, emitter and receiver circuitry are incorporated in the same housing of the diffuse mode sensors. However, diffuse mode sensors do not detect the interruption of the light beam but the reflection of the target. A target is detected if it reflects a sufficient amount of light back to the receiver. The sensing range of diffuse mode sensors thus largely depends on the reflectivity of the target.


Excess gain curvee Excess gain in relation to the distance



Technical data


Ambient temperature	-20+60 °C
Protection class	IP67
Power-on indication	LED, Green
Switching state	LED, Yellow
Error indication	LED, green, Flashing
Excess gain indication	LED, yellow, flashing
Tests/approvals	
Approvals	CE


Excess Gain Curve



Accessories

SMBQ20H	3079041
30 3,4 x 10,3	Mounting bracket, stainless steel, horizontally mounted, for Q20





3079042 Mounting bracket, stainless steel, rectangular, for Q20



Protective housing, stainless steel, for Q20