


K50LDGRYP

LED Signal Light




Technical data

Type	K50LDGRYP
ID	3079720
Signal and display data	
Purpose	LED indicator light
Function	Spotlight
Light type	Green Red Yellow
Dimmable	No
Features of color 1	Green, Permanently on
Features of color 2	Red
Features of color 3	Yellow
Special features	Wash down
Electrical data	
Operating voltage U_B	15...30 VDC
DC rated operating current I_o	≤ 120 mA
Max. current consumption per color	40 mA
Input type	PNP
Response time typical	< 1 ms
Mechanical data	
Cascadable	No
Design	Puck, K50LD
Dimensions	Ø 50 x 38.5 mm
Housing material	Plastic, PC, Black
Electrical connection	Cable, 2 m, PVC
Number of cores	4
Ambient temperature	-40...+50 °C

Features

- LED all-round visible
- Daylight viewable green LED
- Individually controllable
- Protection class IP67
- Multicolor: Green (COL 1) / Red (COL 2) / Yellow (COL 3)
- Cable 2 m
- Operating voltage 15...30 VDC

Wiring diagram

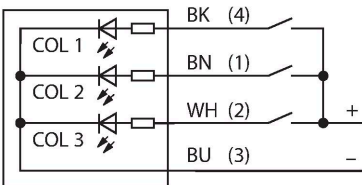


Technical data

Relative humidity	0...90 %
Protection class	IP67
Tests/approvals	
Approvals	CE

Accessories

SMB30A 3032723

Mounting bracket, rectangular, stainless steel, for sensors with 30mm thread



SMB30SC 3052521

Mounting bracket, PBT black, for sensors with 30 mm thread, rotatable

