



LED Linear Light In the Metal Housing WLC60CW340GAR

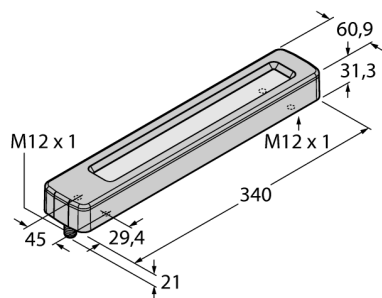

- Cascadable
- Operating voltage: 12...30 VDC
- Protection class IP67/IP69K
- Ambient temperature: -40 °C...+70 °C
- Window material: borosilicate glass
- Housing length: 340 mm
- Monochrome: Cold white
- High protection classes IP67 / IP69K
- Cable, 2 m, 4-pin, rear outlet

Wiring Diagram

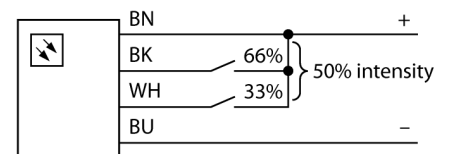

Functional principle

The energy-efficient LED work lights are ideally suited for industrial applications. The color temperature lies in the range of daylight, between 6,000 and 7,100 Kelvin. Depending on the model, the luminous flux is 1,300 or 2,600 lumen. The WLC60 series withstands the toughest environmental conditions and offers a high brightness. Cascadable variants are also available.

Type	WLC60CW340GAR
ID	3086876



Signal and display data	
Purpose	LED work light
Function	Linear light
Light type	White
Color temperature	5650...+6700K
Luminous flux lumen	1300 lm
LED service life (L70)	50000 h
Dimmable	Two-stage
Features of color 1	White, Permanently on, 1300 lm
Special features	Chemical-resistant Wash down Resistant to chemicals

Electrical data	
Operating voltage U_s	12...30 VDC
DC rated operating current I_s	≤ 1.4 mA
Input power	16.8 W

Mechanical data	
Cascadable	Yes
Design	Rectangular, WLC60
Housing material	Metal, Nickel-plated aluminum
Window material	Glass, clear
Electrical connection	Cable, 2 m, PVC
Number of cores	4
Ambient temperature	-40...+70 °C
Protection class	IP67 IP68 IP68

Tests/approvals	
Approvals	CE, UL

Accessories

Type code	Ident no.	Dimension drawing
LMBWLC60MAG	3086909	 Technical drawing of the LMBWLC60MAG component. It is a circular flange with a central hole of diameter 51.8 mm. The flange has a thickness of 20.4 mm. The mounting holes have a diameter of 7 mm. The overall diameter of the flange is 60 mm, and the distance between the mounting holes is 45 mm.
LMBWLC60RA	3086908	 Technical drawing of the LMBWLC60RA component. It is a U-shaped bracket with a central hole of diameter 25 mm. The bracket has a thickness of 30 mm. The mounting holes have a diameter of 7 mm. The overall width of the bracket is 60 mm, and the distance between the mounting holes is 45 mm. The height of the bracket is 50 mm, and the distance from the mounting holes to the central hole is 20 mm. The distance from the central hole to the bottom edge is 40.5 mm, and the distance from the mounting holes to the bottom edge is 52.5 mm.

