


LED Signal Light Tower Light TL50BLGY2R2B2ALSQ

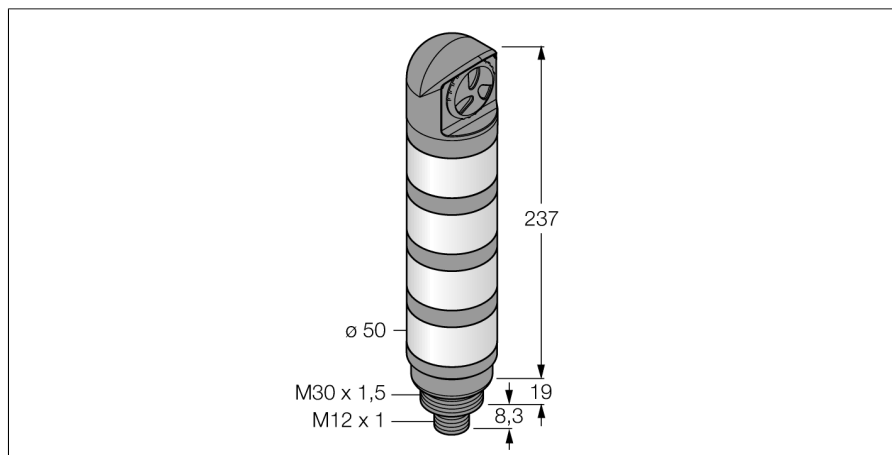

Type	TL50BLGY2R2B2ALSQ
ID	3091175


Signal and display data	
Purpose	LED indicator light
Function	Tower light
Light type	Green Yellow, flashing Red, flashing Blue, flashing
Dimmable	No
Features of color 1	Green, Permanently on, 52 lm
Features of color 2	Yellow, Flashing, 15 lm
Features of color 3	Red, Flashing, 24 lm
Features of color 4	Blue, Flashing, 16 lm
Acoustic signal	Pulsed, 94dB

Electrical data	
Operating voltage U_s	18...30 VDC
DC rated operating current I_s	≤ 45 mA
Operating voltage U_s	21...27VAC
Max. current consumption per color	125 mA
Max. current consumption of beeper	35 mA
Input type	Bipolar (PNP/NPN)22
Response time typical	< 1 ms

Mechanical data	
Cascadable	No
Design	Smooth barrel, TL50
Dimensions	Ø 50 x 204.9 mm
Housing material	Plastic, ABS, Black
Window material	Polycarbonate, clear
Electrical connection	Connector, M12 x 1, PVC
Number of cores	8
Ambient temperature	-20...+50 °C
Relative humidity	0...95%
Protection class	IP67

- Plastic housing, black
- EMI and RFI immune
- Protection class IP67
- M12 x 1 male
- Multicolor: Green (COL 1) / Yellow flashing (COL 2) / Red flashing (COL 3) / Blue flashing (COL 4)
- Operating voltage: 18...30 VDC or 24 VAC with 45 mA per LED color
- Inputs: PNP/NPN
- Beeper: Sealed, continuous tone max. 94 dB

Wiring Diagram

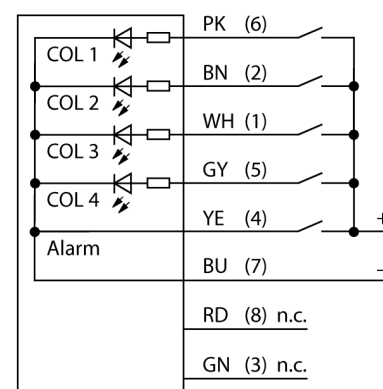

Functional principle

The TL50 tower lights provide highly visible status indicators and a clear user guidance within the entire system. They can be assembled from varicolored LEDs and are available with or without beeper. You can mount them directly on machines, in the cabinet or in locations to be monitored within the production lines.

Tests/approvals	
Approvals	CE, UL listed

The wiring diagram shows a PNP pin assignment.

There are 10 colors available blue (B), green (G), red (R), yellow (Y), white (W), turquoise (T), orange (O), violet (V), sky blue (S) and magenta (M), which specify the light sequence from bottom to top in the type code of the tower light. Example: TL50GYRQ, colors green, yellow and red arranged from bottom to top.