


LED Signal Light Beacon K30LWXXP



Type	K30LWXXP
ID	3091270

Signal and display data	
Purpose	LED indicator light
Function	Spotlight
Light type	White
Dimmable	No
Features of color 1	White, Permanently on
Special features	Wash down


Electrical data	
Operating voltage U_o	10...30 VDC
DC rated operating current I_o	≤ 25 mA
Max. current consumption per color	25 mA
Input type	PNP
Response time typical	< 1 ms

Mechanical data	
Cascadable	No
Design	Dome, K30L
Dimensions	$\varnothing 30 \times 44.5$ mm
Housing material	Plastic, PC, Black
Window material	Polycarbonate, diffuse
Electrical connection	Cable, 2 m, PVC
Number of cores	4
Ambient temperature	$-40 \dots +50$ °C
Relative humidity	0...90%
Protection class	IP67
	IP69

Tests/approvals	
MTTF	626 years acc. to SN 29500 (Ed. 99) 40 °C
Approvals	CE

- LED all-round visible
- Individually controllable
- Mechanical screw-in thread M22x1.5
- Protection class IP67
- Monochrome: White (COL 1)
- Cable 2 m
- Operating voltage 10...30 VDC

Wiring Diagram

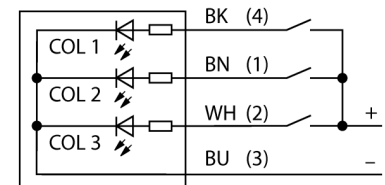

Accessories

Type code	Ident no.		Dimension drawing
SMB22A	3079414	Mounting bracket, stainless steel, for K30L series	