


LED Linear Light In the Metal Housing WLS28-2XW285XM

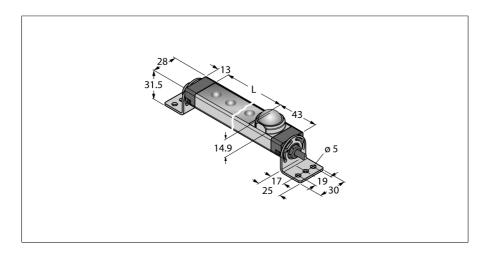


Туре	WLS28-2XW285XM	
ID	3094462	
Signal and display data		
Purpose	LED work light	
Function	Linear light	
Light type	White	
Color temperature	6100+7000K	
Luminous flux lumen	650 lm	
Aperture angle degree	60 °	
Beam angle	wide beam 40-80°	
LED service life (L70)	50000 h	
Dimmable	No	
Features of color 1	White, Permanently on, 800 lm	
Electrical data		
Operating voltage U _B	1230 VDC	
DC rated operating current I _e	≤ 660 mA	
Input power	7.92 W	
Current consumption non-actuated	≤ 0.17 mA	
Mechanical data		
Cascadable	No	
Design	Rectangular, WLS28-2	
Housing material	Metal, AL	
Window material	Polycarbonate, clear	
Electrical connection	Cable, 2 m, PVC	
Number of cores	3	
with motion switch	yes	
Ambient temperature	-20+60 °C	
Storage temperature	-40+70 °C	
Relative humidity	090%	
NCIALIVE HUITIIUILV	U9U70	

CE, UL

- Motion switch
- Light beam: 285mm
- Operating voltage: 12...30 VDC
- Protection class: IP50
- Color: White
- Cable, PVC, 2 m
- SMBWLS28RA mounting bracket included in delivery

Wiring Diagram



Functional principle

The energy-efficient LED work lights are ideally suited for industrial applications. The color temperature is between 6,000 and 7,100 Kelvin (cool white). Depending on the model, the luminous flux is 325 or 2600 lumen. The LED light is switched on/off via a built-in motion switch. The range of the motion switch is 12 meters at a field of view of \pm 45 °. After about 60 seconds without motion detection, the LED light will turn off automatically. Moreover, this motion switch can be disabled by controlling a high signal on pin 4. Cascadable variants are also available. Variants with a clear or diffuse plastic windows, as well as with an aperture angle of 25°.

Approvals



Accessories

Type code	Ident no.		Dimension drawing
SMBWLSMAG	3019574	Magnetic fixture for mounting work lights and sensors, 2 pieces	o 5,1 o 51,8
SMBWLS28RA	3015764	Mounting bracket, angled, metal, for WLS28 work lights, 5 mm drill holes, screw set included	0 3 0 24 0 15,3 0 5 18 18 19 25
SMBWLS28SP	3088063	Snap bracket for mounting WLS28 work lights	28,9 35 17,8 1,07,1 35