


Pick-to-Light Placement Sensor Capacitive Button K30ABTGWHQP

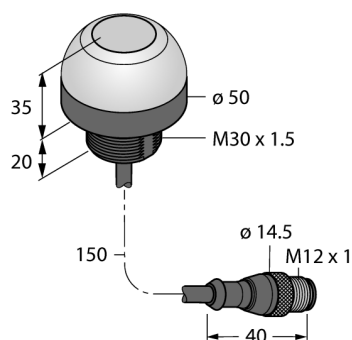

Type	K30ABTGWHQP
ID	3094515

Signal and display data	
Purpose	Pick-to-Light
Function	Touch Button
Light type	Green White
LED service life (L70)	50000 h
Switch Function	Momentary
Features of color 1	Green, Permanently on
Features of color 2	White
Special features	Wash down



Electrical data	
Operating voltage U_a	12...30 VDC
DC rated operating current I_a	≤ 150 mA
Max. current consumption per color	55 mA
Output function	NO contact, PNP/NPN
Input type	Bipolar (PNP/NPN)
Response time typical	< 150 ms

Mechanical data	
Design	Dome, K30
Dimensions	Ø 30 x 41 mm
Housing material	Plastic, PC, Black
Window material	Polycarbonate, diffuse
Electrical connection	Cable with connector, M12 × 1, 0.15 m, PVC
Number of cores	5
Ambient temperature	-40...+50 °C
Relative humidity	0...90%
Protection class	IP67 IP69

Tests/approvals	
Approvals	CE

- Protection class IP67/IP69K
- Cable with M12 × 1 male connector, 4-pin, 150 mm
- Disabled: Green (COL 1)
- Enabled: White (COL 2)
- Operating voltage 10...30 VDC
- Bipolar circuit
- NO contact

Wiring Diagram

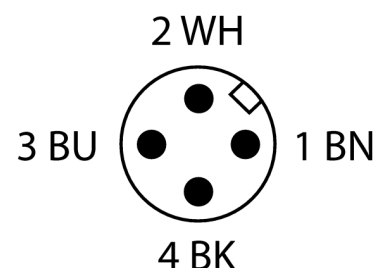

Functional principle

The K50 pick-and-place sensor is suitable for many mounting and component placement applications. LED light is reflected perfectly by the entire dome. The device has two display colors depending on the version: Color 1

Shows the disabled state, color 2 the enabled state. Since the device has no inputs, a color change is exclusively realized by touching the sensor (enable). Devices with a hold function keep the enabled state, even when the contact ends.

Accessories

Type code	Ident no.		Dimension drawing
SMB22A	3079414	Mounting bracket, stainless steel, for K30L series	