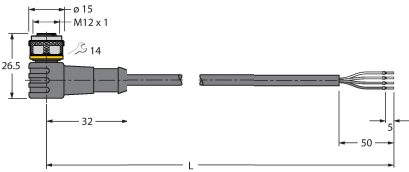


Technical data

Ambient temperature	-40...+60 °C
Storage temperature	-40...+70 °C
Protection class	IP67 IP69
Power-on indication	LED, Green
Switching state	LED, Yellow
Tests/approvals	
Approvals	ECOLAB
Approvals	CE cULus

sensing range and are more susceptible to disturbances caused by shiny objects. The Q76 product series is characterized by an extra-wide beam of light, which enables the edges of objects that are not standard shapes to be reliably detected. Various sensitivity settings facilitate operation in the area of material handling.

Accessories

Dimension drawing	Type	ID	
	RKC4.4T-2/TEL	6625013	Connection cable, female M12, straight, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com
	WKC4.4T-2/TEL	6625025	Connection cable, female M12, angled, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com