


# PSW4S-10/TEL

## Actuator and Sensor Cable, PVC – Connection Cable



### Features

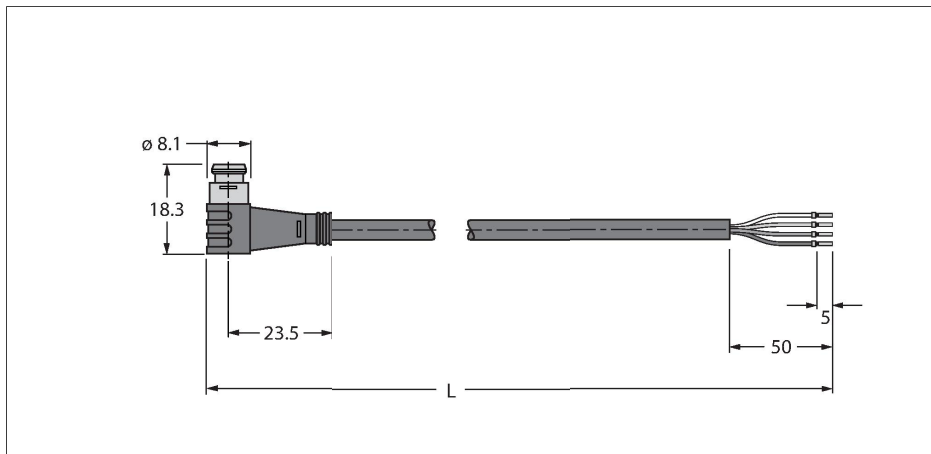


- Male Ø 8, angled, 4-pin, snap-on type
- Sheath material: PVC
- Sheath color: black
- Resistant to chemicals and oils
- Flame retardant
- Resistant to acids and alkaline solutions
- Resistant to microbes and hydrolysis
- LABS free
- RoHS conform
- Protection class IP67
- Cable length: 10 m

### Technical data

|                                 |                                                              |
|---------------------------------|--------------------------------------------------------------|
| Type                            | PSW4S-10/TEL                                                 |
| ID                              | 6627381                                                      |
| Connector A                     | Male, Ø 8 mm, Angled                                         |
| Number of pins                  | 4                                                            |
| Contacts                        | Brass, CuZn, Gold-plated                                     |
| Contact carriers                | Plastic, TPU, Black                                          |
| Connector body                  | Plastic, TPU, Black                                          |
| Tightening torque (range)       | 0.5 ... 0.6 Nm<br>(observe max. torque of mating connector!) |
| Mechanical lifespan             | > 100 Mating cycles                                          |
| Pollution degree                | 3                                                            |
| Protection class                | IP67, (plugged)                                              |
| Cable                           |                                                              |
| Cable diameter                  | Ø 4.6 mm ±0.20                                               |
| Cable length                    | 10 m                                                         |
| Cable jacket                    | PVC, Black                                                   |
| Core insulation                 | PVC                                                          |
| Core cross-section              | 4 x 0.34 mm <sup>2</sup>                                     |
| Arrangement of strands          | 42 x 0.1 mm                                                  |
| Core colors                     | BN, WH, BU, BK                                               |
| Electrical properties at +20 °C |                                                              |
| Rated voltage                   | 50 V <sub>AC</sub> /60 V <sub>DC</sub>                       |
| Test voltage                    | 2000 V                                                       |
| Current                         | 4 A                                                          |
| Insulation resistance           | > 30.5 MΩ/km                                                 |
| forward resistance              | max. 57 Ω/km                                                 |

### Cable Cross-Section

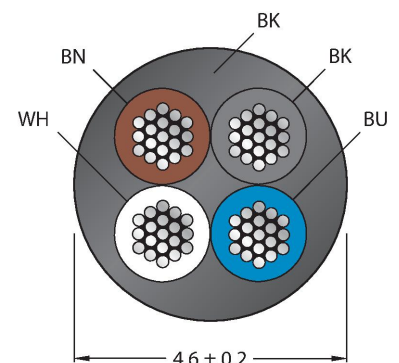

### Contact assignment



### Circuit Diagram



Technical data

| Mechanical and chemical properties       |               |
|------------------------------------------|---------------|
| Bending radius (stationary installation) | ≥ 5 x Ø       |
| Bending radius (flexible use)            | ≥ 10 x Ø      |
| Ambient temperature (fixed)              | -40...+105 °C |
| Ambient temperature (mobile)             | -5...+80 °C   |
| Approvals                                | cULus         |


Accessories

TORQUE-WRENCH-SET-AS6936170

Torque wrench set; handles with adjustable torque 0.4-1.0 Nm, torque wrench for M8 (SW9), fork wrench for M12 (SW 14)

BLANK-LABEL-FOR-CORDSETS-TEL-TXL6936206

Label for TEL and TXL cables, length: 18 mm, height: 4 mm, material: polycarbonate (PC), color: white, halogen-free and flame-retardant



HA5141-06905405

Field-wireable female connector, M8 × 1, straight, 4-pin, insulation piercing connection, cable feedthrough 2.5 to 5.1 mm, core cross-section/terminal capacity 0.14 to 0.34 mm², plastic housing, metal nut

B5143-06901031

Konfektionierbare Kupplung, M8 x 1, gerade, 4-polig, Schraubklemmanschluss, Leitungsdurchlass 3.5 bis 5.0 mm, Adernquerschnitt/ Klemmvermögen 0.14 bis 0.50 mm², Kunststoffgehäuse, Metallüberwurfmutter

H5141-06902720

Field-wireable female connector, M8 × 1, straight, 4-pin, pressfit technology, cable feedthrough 4.0 to 5.0 mm, core cross-section/terminal capacity 0.14 to 0.34 mm², plastic housing, metal nut

H5241-06902820

Field-wireable female connector, M8 × 1, angled, 4-pin, pressfit technology, cable feedthrough 4.0 to 5.0 mm, core cross-section/terminal capacity 0.14 to 0.34 mm², plastic housing, metal nut

FW-PRKPM0420-SA-S-0406100002293

Field-wireable female connector, M8 × 1, straight, 4-pin, screw terminal connection, cable feedthrough 4.0 to 5.5 mm, core cross-section/terminal capacity 0.14 to 0.5 mm², plastic housing, metal coupling nut

Accessories

| Dimension drawing                                                                 | Type                  | ID        |                                                                                                                                                                            |
|-----------------------------------------------------------------------------------|-----------------------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | LABEL-HOLDER-FLEX-PVC | 100048170 | PVC label holder for identification of extension cables (TEL/TXL product series); for cable diameters: min. 5 mm; dimensions 4 × 18 mm; delivery unit: 50 pcs. per package |