

# WKC5T-P7X3.2-12.5-RSC5T/TXL

## Actuator and Sensor Cable, PUR – Extension Cable



### Technical data


|                              |                                         |
|------------------------------|-----------------------------------------|
| Type                         | WKC5T-P7X3.2-12.5-RSC5T/TXL             |
| ID                           | 6629414                                 |
| Remark to product            | !!! Pin 5 = PE !!!                      |
| Connector A                  | Female, M12 × 1, Angled, A-coded        |
| Number of pins               | 4+PE                                    |
| Contacts                     | Brass, CuZn, Gold-plated                |
| Contact carriers             | Plastic, TPU, Black                     |
| Connector body               | Plastic, TPU, Translucent               |
| Coupling nut/screw           | Brass, CuZn, Nickel-plated              |
| Seal                         | Plastic, FPM/FKM                        |
| LED display                  | triple LED                              |
| Display operating voltage    | LED, Green                              |
| Display switch state         | LED, Yellow/white                       |
| Mechanical lifespan          | > 100 Mating cycles                     |
| Pollution degree             | 3                                       |
| Protection class             | IP67, IP69K, Only in screwed condition  |
| Connector B                  | Male, M12 × 1, Straight, A-coded        |
| Number of Pins               | 4+PE                                    |
| Contacts                     | Brass, CuZn, Gold-plated                |
| Contact carriers             | Plastic, TPU, Black                     |
| Connector body               | Plastic, TPU, Black                     |
| Coupling nut/retaining screw | Brass, CuZn, Nickel-plated              |
| Mechanical life              | > 100 Mating cycles                     |
| Pollution degree             | 3                                       |
| Protection class             | IP67, IP69K, Only when screwed together |
| Cable                        |                                         |
| Cable diameter               | Ø 4.8 mm ±0.20                          |

### Features



- Female M12, angled, 4-pin + PE
- With 3-color LED (PNP, white, yellow, green)
- Male M12, straight, 4-pin + PE
- Jacket material: PUR
- Jacket color: black
- Suitable for drag chain use
- Resistant to chemicals, UV radiation and oils
- Flame retardant (FT2 acc. to UL 1581, IEC 60332-2-2)
- Resistant to welding sparks
- Free from halogen, silicone, PVC and LABS
- Particularly resistant to abrasion
- Protection class: IP67, IP69K
- Cable length: 12.5 meters

### Cable Cross-Section

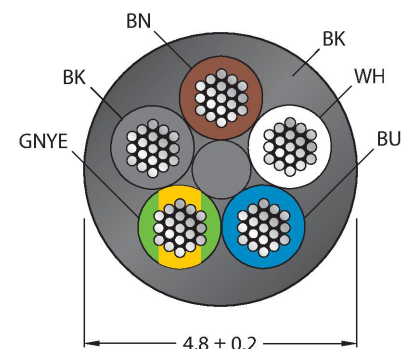


### Contact assignment

## Technical data

|                                          |                              |
|------------------------------------------|------------------------------|
| Cable length                             | 12.5 m                       |
| Cable jacket                             | PUR, Black                   |
| Core insulation                          | PP                           |
| Core cross-section                       | 5 x 0.34 mm <sup>2</sup>     |
| Arrangement of strands                   | 42 x 0.1 mm                  |
| Core colors                              | BN, WH, BU, BK, GNYE         |
| Electrical properties at +20 °C          |                              |
| Rated voltage                            | 30 V <sub>DC</sub>           |
| Test voltage                             | 2000 V                       |
| Current                                  | 4 A                          |
| Insulation resistance                    | > 30.5 MΩ/km                 |
| forward resistance                       | max. 57 Ω/km                 |
| Mechanical and chemical properties       |                              |
| Bending radius (stationary installation) | ≥ 5 x Ø                      |
| Bending radius (flexible use)            | ≥ 10 x Ø                     |
| Bending cycles                           | ≥ 5 million                  |
| Admissible acceleration                  | max. 5 m/s <sup>2</sup>      |
| Admissible travel path, horizontal       | 5 m (at 5 m/s <sup>2</sup> ) |
| Admissible travel path, vertical         | 2 m (at 5 m/s <sup>2</sup> ) |
| Admissible traversing speed              | 3.3 m/s                      |
| Torsional stress                         | ± 180 °/m                    |
| Ambient temperature (fixed)              | -50...+80 °C                 |
| Ambient temperature (mobile)             | -25...+80 °C                 |
| Ambient temperature (drag chain)         | -25...+60 °C                 |
| Approvals                                | cULus                        |




### Circuit Diagram



## Accessories

|                      |                                                                                                                       |                                  |                                                                                                                                         |
|----------------------|-----------------------------------------------------------------------------------------------------------------------|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| TORQUE-WRENCH-SET-AS | 6936170                                                                                                               | BLANK-LABEL-FOR-CORDSETS-TEL-TXL | 6936206                                                                                                                                 |
|                      | Torque wrench set; handles with adjustable torque 0.4-1.0 Nm, torque wrench for M8 (SW9), fork wrench for M12 (SW 14) |                                  | Label for TEL and TXL cables, length: 18 mm, height: 4 mm, material: polycarbonate (PC), color: white, halogen-free and flame-retardant |



## Accessories

| Dimension drawing                                                                   | Type                  | ID        |                                                                                                                   |
|-------------------------------------------------------------------------------------|-----------------------|-----------|-------------------------------------------------------------------------------------------------------------------|
|  | LABEL-HOLDER-FLEX-PVC | 100048170 | PVC label holder for identification of extension cables (TEL/TXL product series); for cable diameters: min. 5 mm; |

| Dimension drawing | Type | ID |                                                          |
|-------------------|------|----|----------------------------------------------------------|
|                   |      |    | dimensions 4 × 18 mm; delivery unit: 50 pcs. per package |