


# PKWH4M-P7X2-0.6-PSGH4M/TFG

## Food & Beverage Hygienic, TPE – Extension Cable




### Features

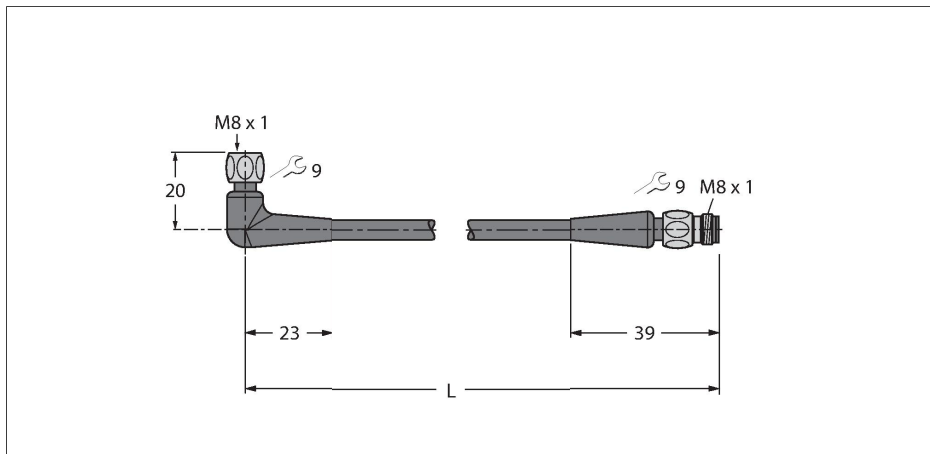

- M8 female connector, angled, 4-pin
- Stainless steel coupling nut/screw
- With 2-color LED (PNP, yellow, green)
- M8 male connector, straight, 4-pin
- Sheath material: TPE-O
- Sheath color: light gray RAL 7035
- Qualified for drag chain use
- Resistant to chemicals and microbes
- Weatherproof
- Resistant to hydrolysis acc. to DIN EN 60068-2-78
- Flexible at low temperatures
- Free from silicone and PVC
- Halogen-free acc. to DIN EN 50267-2-1, IEC 60754-1, VDE 0482-267-2-1
- Approvals: Gost, Ecolab, FDA
- RoHS and REACH compliant
- Protection classes IP67, IP69K
- Cable length: 0.6 m

### Cable Cross-Section

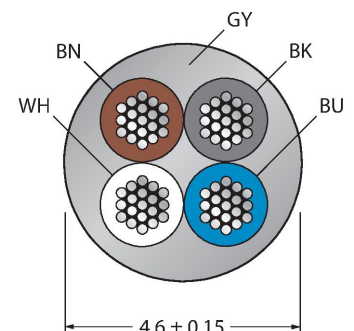

### Contact assignment




### Technical data

|                              |                                                              |
|------------------------------|--------------------------------------------------------------|
| Type                         | PKWH4M-P7X2-0.6-PSGH4M/TFG                                   |
| ID                           | 6933538                                                      |
| Connector A                  | Female, M8 × 1, Angled                                       |
| Number of pins               | 4                                                            |
| Contacts                     | Brass, CuZn, Gold-plated                                     |
| Contact carriers             | Plastic, PP, Gray                                            |
| Connector body               | Plastic, PP, Transparent                                     |
| Coupling nut/screw           | Stainless Steel, V4A                                         |
| Seal                         | Plastic, FPM/FKM                                             |
| Tightening torque (range)    | 0.5 ... 0.6 Nm<br>(observe max. torque of mating connector!) |
| LED display                  | dual LED                                                     |
| Display operating voltage    | LED, Green                                                   |
| Display switch state         | LED, Yellow                                                  |
| Mechanical lifespan          | > 100 Mating cycles                                          |
| Pollution degree             | 3                                                            |
| Protection class             | IP67, IP69K, Only in screwed condition                       |
| Connector B                  | Male, M8 × 1, Straight                                       |
| Number of Pins               | 4                                                            |
| Contacts                     | Brass, CuZn, Gold-plated                                     |
| Contact carriers             | Plastic, PP, Gray                                            |
| Connector body               | Plastic, PP, Gray                                            |
| Coupling nut/retaining screw | Stainless Steel, V4A                                         |
| Tightening torque            | 0.5 ... 0.6 Nm (observe max. torque of mating connector!)    |
| Mechanical life              | > 100 Mating cycles                                          |
| Pollution degree             | 3                                                            |

Technical data

|                                          |                                                    |
|------------------------------------------|----------------------------------------------------|
| Protection class                         | IP65, IP67, IP68, IP69, Only when screwed together |
| Cable                                    |                                                    |
| Cable diameter                           | Ø 4.6 mm ±0.15                                     |
| Cable length                             | 0.6 m                                              |
| Cable jacket                             | TPE-O, Gray                                        |
| Core insulation                          | TPE-E                                              |
| Core cross-section                       | 4 x 0.34 mm²                                       |
| Arrangement of strands                   | 42 x 0.1 mm                                        |
| Core colors                              | BN, WH, BU, BK                                     |
| Electrical properties at +20 °C          |                                                    |
| Rated voltage                            | 30 V                                               |
| Test voltage                             | 2000 V                                             |
| Current                                  | 4 A                                                |
| Insulation resistance                    | ≥ ≥ 10 <sup>8</sup> Ω                              |
| Nom. capacitance                         | 82 pF/m                                            |
| Nom. Inductance                          | 0.73 mH/km                                         |
| Mechanical and chemical properties       |                                                    |
| Max. tensile strength (static)           | ≤ 50 N/mm²                                         |
| Max. tensile strength (dynamic)          | ≤ 20 N/mm²                                         |
| Bending radius (stationary installation) | ≥ 5 x Ø                                            |
| Bending radius (flexible use)            | ≥ 10 x Ø                                           |
| Bending cycles                           | ≥ 4 million                                        |
| Admissible acceleration                  | max. 5 m/s²                                        |
| Admissible travel path, horizontal       | 5 m (at 5 m/s²)                                    |
| Admissible travel path, vertical         | 2 m (at 5 m/s²)                                    |
| Admissible traversing speed              | 3 m/s                                              |
| Torsional stress                         | ± 180 °/m                                          |
| Ambient temperature (fixed)              | -40...+105 °C                                      |
| Ambient temperature (mobile)             | -25...+105 °C                                      |
| Ambient temperature (drag chain)         | -25...+60 °C                                       |

Circuit Diagram



Accessories

|                                                                                                                       |         |
|-----------------------------------------------------------------------------------------------------------------------|---------|
| TORQUE-WRENCH-SET-AS                                                                                                  | 6936170 |
| Torque wrench set; handles with adjustable torque 0.4-1.0 Nm, torque wrench for M8 (SW9), fork wrench for M12 (SW 14) |         |