


LED-signaallamp

Signaallamp

K50LYBWP



Type	K50LYBWP
Identnr.	3078331

Signaal- en weergavegegevens	
Toepassingsdoel	LED-lamp
Functie	Spot-licht
Lichtsoort	geel Blauw wit
Dimbaar	Nee
Kenmerken kleur 1	Geel, Doorlopend aan
Kenmerken kleur 2	Blauw
Kenmerken kleur 3	Wit
Bijzondere kenmerken	Wash down


Elektrische gegevens	
Bedrijfsspanning U_s	18...30 VDC
DC nominale bedrijfsstroom I_s	≤ 40 mA
Max. stroomverbruik per kleur	40 mA
Ingangstype	PNP
Aansprektijd typisch	< 1 ms

Mechanische gegevens	
In cascade monteerbaar	Nee
Bouwworm	Hemisfeer, K50L
Afmetingen	$\varnothing 50 \times 58$ mm
Materiaal behuizing	Kunststof, PC, zwart
Window material	Polycarbonaat, diffuus
Elektrische aansluiting	Kabel, 2 m, PVC
Aantal aders	4
Omgevingstemperatuur	-40...+50 °C
Relatieve luchtvochtigheid	0...90%
Beschermingsgraad	IP67 IP69



Tests/certificaten	
MTTF	249 Jaren volgens SN 29500 (Ed. 99) 40 °C
Certificaten	CE, UL gelisted

- rondom zichtbare LED-lamp
- apart aanstuurbaar
- mechanische schroefdraad M30x1.5
- beschermingsgraad IP67
- kleuren: geel (COL 1) / blauw (COL 2) / wit (COL 3)
- kabel, 2m
- bedrijfsspanning 18...30 VDC

Aansluitschema

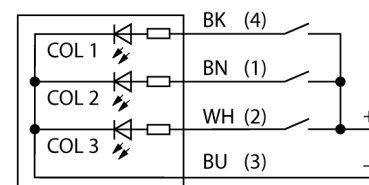

Toebehoren

Type	Ident no.		Afmetingen
SMB30A	3032723	montagebeugel, haaks, roestvast staal, voor sensoren met 30mm schroefdraad	 Technical drawing of the SMB30A mounting bracket. It is an L-shaped bracket made of stainless steel. Dimensions include: top horizontal arm width 45mm, vertical arm height 38.5mm, mounting hole diameter 30.5mm, bracket thickness 6.3mm, bottom horizontal arm width 69mm, and a 7.5mm gap at the bottom. A 6mm hole is located on the vertical arm, and a 40mm radius (R 40) is specified at the bottom corner.
SMB30SC	3052521	montagebeugel, PBT-zwart, voor sensoren met 30 mm schroefdraad, oriënteerbaar	 Technical drawing of the SMB30SC mounting bracket. It is a black PBT bracket. Dimensions include: top horizontal arm width 66.5mm, vertical arm height 58.7mm, mounting hole diameter 30mm (M30 x 1.5), bracket thickness 12.7mm, bottom horizontal arm width 50.8mm, and a 29mm gap at the bottom. A 7mm hole is located on the vertical arm.