


LED-signaallamp

Signaallamp

K50LGXXA120Q

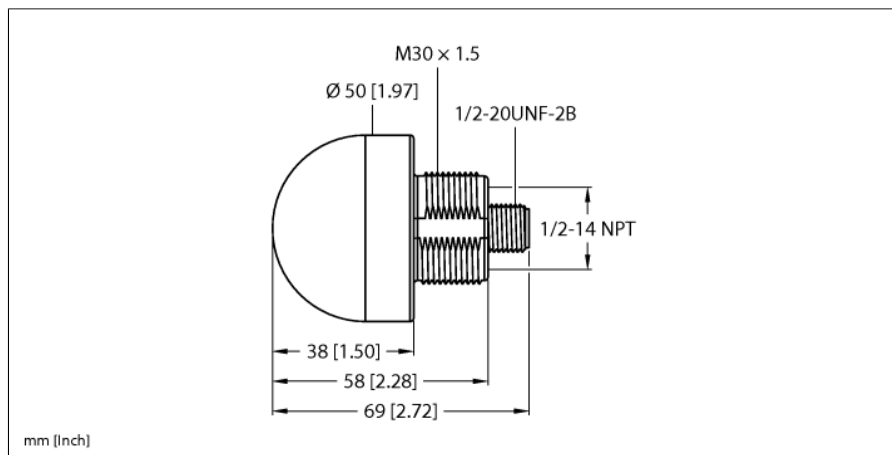

Type	K50LGXXA120Q
Identnr.	3095163

Signaal- en weergavegegevens	
Toepassingsdoel	LED-lamp
Functie	Spot-licht
Lichtsoort	groen
LED-levensduur (L70)	50000 h
Dimbaar	Nee
Kenmerken kleur 1	Groen, Doorlopend aan
Bijzondere kenmerken	Wash down


Elektrische gegevens	
Bedrijfsspanning U _b	85...130VAC
Max. stroomverbruik per kleur	15 mA
Uitgangsfunctie	N.O.-contact, potentiaalvrij
Ingangstype	AC
Aansprektijd typisch	< 1 ms

Mechanische gegevens	
In cascade monteerbaar	Nee
Bouwworm	Hemisfeer, K50L
Afmetingen	Ø 50 x 69 mm
Materiaal behuizing	Kunststof, PC, zwart
Window material	Polycarbonaat, diffuus
Elektrische aansluiting	Connector, 1/2-20UNF-2B
Aantal aders	5
Omgevingstemperatuur	-40...+50 °C
Relatieve luchtvochtigheid	0...90%
Beschermingsgraad	IP67
	IP69

Tests/certificaten	
MTTF	249 Jaren volgens SN 29500 (Ed. 99) 40 °C
Certificaten	CE, UL gelisted

- rondom zichtbare LED-lamp
- apart aanstuurbaar
- mechanische schroefdraad M30x1,5
- beschermingsgraad IP67/IP69K
- monochroom: groen (COL 1)
- Connector 1/2-20UNF-2B
- Bedrijfsspanning 85...130 VAC

Aansluitschema

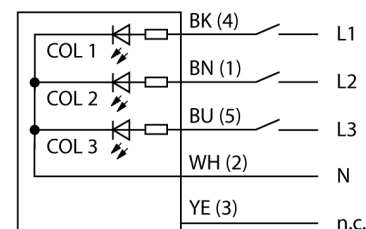

Toebehoren

Type	Ident no.		Afmetingen
SMB30A	3032723	montagebeugel, haaks, roestvast staal, voor sensoren met 30mm schroefdraad	 Technical drawing of the SMB30A mounting bracket. It is an L-shaped bracket made of stainless steel. Dimensions include: top horizontal arm width 45mm, vertical arm height 38.5mm, mounting hole diameter 30.5mm, bracket thickness 6.3mm, bottom horizontal arm width 69mm, and a 7.5mm gap at the bottom. A 61mm dimension is shown for the vertical arm's offset, and a 6.3mm dimension for the bottom arm's offset. A radius of R 40 is indicated at the bottom corner.
SMB30SC	3052521	montagebeugel, PBT-zwart, voor sensoren met 30 mm schroefdraad, oriënteerbaar	 Technical drawing of the SMB30SC mounting bracket. It is a rectangular bracket made of black PBT. Dimensions include: top horizontal arm width 66.5mm, vertical arm height 58.7mm, mounting hole diameter 30mm, bracket thickness 1.5mm, bottom horizontal arm width 50.8mm, and a 29mm gap at the bottom. A 12.7mm dimension is shown for the top arm's offset, and a 7mm dimension for the bottom arm's offset.