


Voedingskabel
TPE-kabelmantel
RSM RKM 126-15M/S3059



- 1 1/8" minifast-connector, recht
- 1 1/8" minifast-contraconnector, recht
- 1-1/8"-connector, recht, 12-polig
- 1 1/8" contraconnector, recht, 12-polig
- Power-Tray/Exposed Run/Direct Burial-kabel
- TPE-buitenmantel, geel, 12 × 16 AWG
- UV-bestendig
- -40 °C koude buigsterkte
- Oliebestendig
- Brandklassen: UL 1685 FT4, UL 1061, CSA FT1, CSA FT4

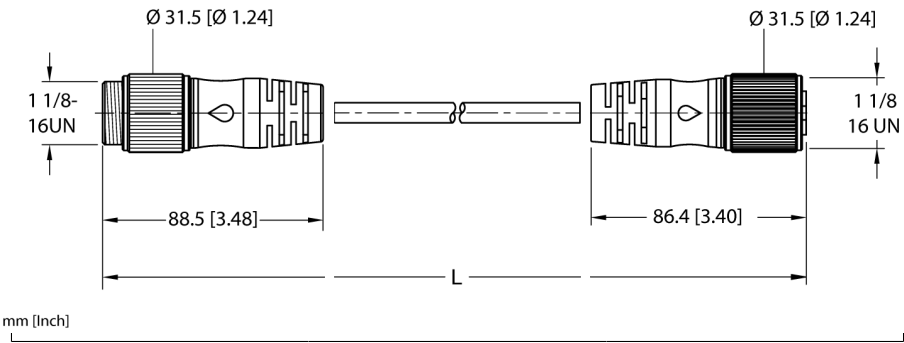


Type	RSM RKM 126-15M/S3059
Identnr.	U-36375

Connector A	Connector, 1 1/8"-16 UN, Recht
Aantal polen	12
Contacten	Messing, CuZn, Verguld
Contactdrager	Kunststof, TPU, Geel
Greep	Kunststof, TPU, Geel
Wartelmoer/-bout	Messing, CuZn, Vernikkeld
Beschermingsklasse	IP67, IP68, IP69, IP69K
Mechanische levensduur	> 100 Steekcycli
Vervuilingsgraad	3

Connector B	Contraconnector, 1 1/8"-16 UN, Recht
Aantal polen	12
Contacten	Messing, CuZn, Verguld
Contactdrager	Kunststof, TPU, Geel
Greep	Kunststof, TPU, Geel
Wartelmoer/-bout	Messing, CuZn, Vernikkeld
Beschermingsklasse	IP67, IP68, IP69, IP69K

Kabeldiameter	Ø 14.61 mm
Kabellengte	15 m
Kabelmantel	TPE, Geel
Aderisolatie	PVC/nylon
Aderkleuren	OG, BU, WH/BK, RD/BK, GN/BK, OG/BK, BU/BK, BK/WH, GN/YE, RD, WH, BK
Aderdoorsnede	12
Draadopbouw	65

Nominale spanning	600 V
Stroombelastbaarheid	7 A

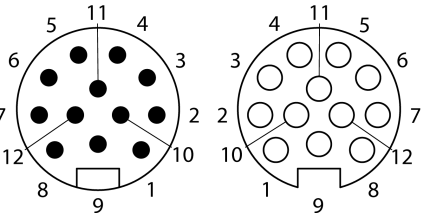

schakelplan

1	OG	1
2	BU	2
3	WH/BK	3
4	RD/BK	4
5	GN/BK	5
6	OG/BK	6
7	BU/BK	7
8	BK/WH	8
9	GN/YE	9
10	RD	10
11	WH	11
12	BK	12