


Przetwarzanie obrazu


Camera P3

PPROCAMS-R-P

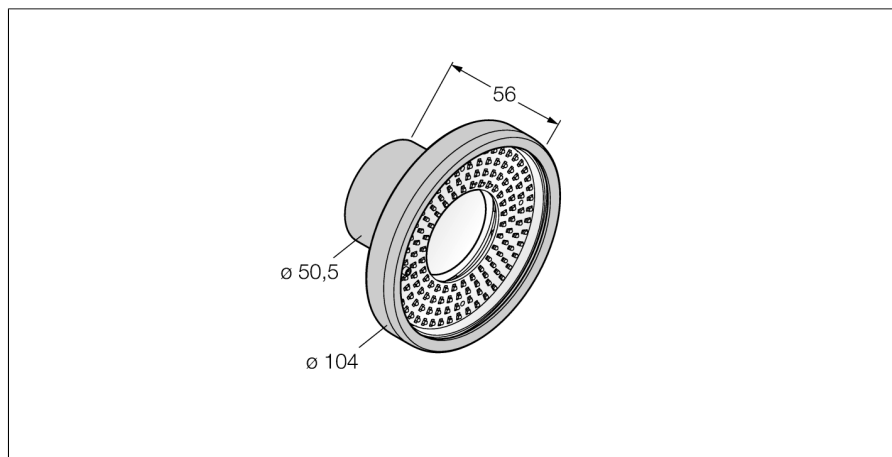

- Compact camera with integrated ring light
- Housing material aluminium
- Plastic inspection window
- Protection class IP68
- Lens to be ordered separately
- Separate controller required, type PPROC-TL
- 1/3" CMOS, 752x480 pikseli
- 256-stopniowa skala szarości

Schemat podłączenia

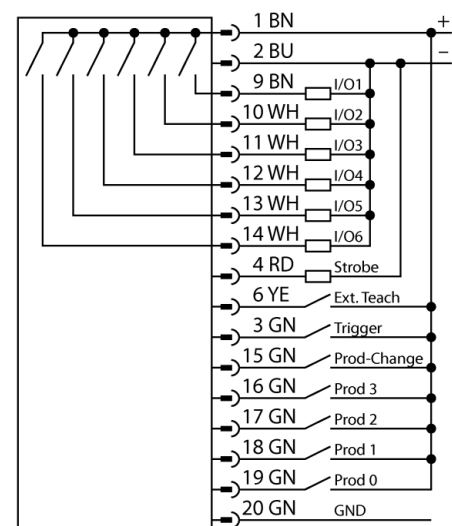

Zasada działania

The image processing system PresencePLUS PRO consists of the compact camera and the processing unit incorporated in a separate controller. Lens, external/internal lighting and connection cable are to be ordered separately. Freeware and firmware updates are available for download on:

www.bannerengineering.com

Typ	PPROCAMS-R-P
Nr kat.	3077027
Dane kamery	
Resolution	640 × 480 pikseli
Rodzaj światła	czerwony
Długość fali	620...630 nm
Brennweite	16 mm
Cechy szczególne	Do mycia
Prąd znamionowy DC I _a	≤ 650 mA
Protokół komunikacyjny	EtherNet/IP
	Modbus TCP
	Modbus TCP
	PCCC
	RS232
Dane mechaniczne	
Wymiary	Ø 104 x 143.3 mm
Materiał obudowy	Metal, Niklowane aluminium
Window material	akryl, przezroczysty
Temperatura pracy	0...+50 °C
Stopień ochrony	IP68
Testy/aprobata	
Certyfikaty	CE