


CANopen için piconet tek başına modülü

2-channel Up/Down Counter


SCOB-0202D-0003

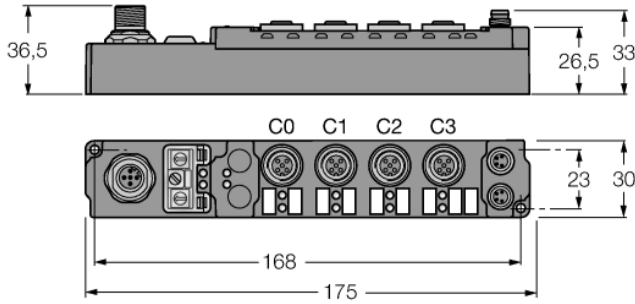


- Up/down counter
- 2-channel
- Switching frequency 100 kHz
- Configuration interface
- Parameterizable functions
- Supported via I/O-ASSISTANT 2
- Direct connection to the fieldbus
- Fibre-glass reinforced housing
- Shock and vibration tested
- Encapsulated module electronics
- Metal connector
- Degree of protection IP67

Tip	SCOB-0202D-0003
Tanıt. no.	6824132
Kanal sayısı	4
Operating / load voltage	20...29 VDC
Operating current	≤ 30 mA
Fieldbus iletim hızı	10 kbps ...1 Mbps
Fieldbus adresleme	0 to 99
Servis arayüzü	parameterisation via I/O-ASSISTANT
Electrical isolation	Fieldbus to operational voltage
Number of channels	2 count-, 2 gate inputs, 2 V/R changeover contacts
Düşük seviye sinyal gerilimi	-3 to 5 VDC
Anahtarlama frekansı	≤ 100000 Hz
Number of channels	2 x 24 VDC/0.5 A, short-circuit proof
High level signal voltage	11...30 VDC
Akım tüketimi	≤ 10 mA
Sensör besleme	short-circuit proof, max. 0.5 A from operating voltage
Boyutlar (W x L x H)	30 x 175 x 26.5 mm
Titreşim testi	EN 60068-2-6 uyarınca
Darbe testi	acc. to DIN EN 60068-2-27
Elektromanyetik uyumluluk	EN 61000-6-2/EN 61000-6-4 uyarınca
IP Derecesi	IP67
Onaylar	CE, cULus


M12 × 1 Fieldbus



M12 × 1 Giriş

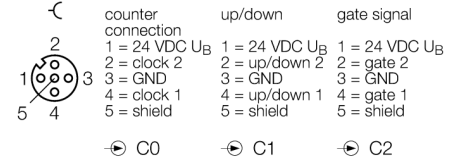

M12 × 1 Çıkış



M8 × 1 Güç Besleme

