


IP-Link için piconet Uzatma Modülü

8 Digital PNP Inputs Filter 3 ms


8 Digital Outputs 0.5 A

SNNE-0808D-0003

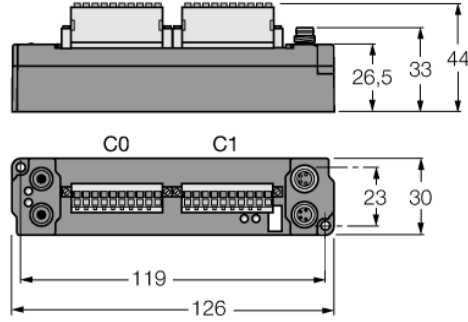


- Direct connection to the IP link
- IP20 terminals, tension spring connections
- Fiber-glass reinforced PA6 housing
- Encapsulated module electronics
- Metal round connector
- Degree of protection IP20


Giriş IP20 Terminal

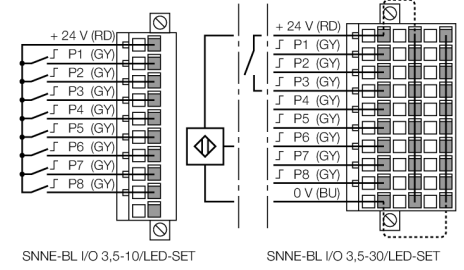

Çıkış IP20 Terminal

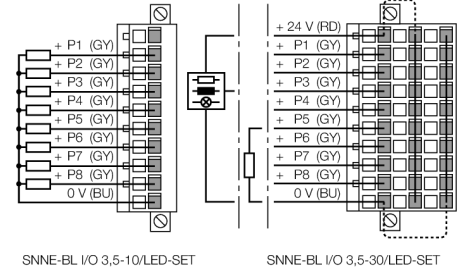

M8 × 1 Güç Besleme



Tip	SNNE-0808D-0003
Tanıt. no.	6824473
Kanal sayısı	16
Operating / load voltage	20...29 VDC
Operating current	≤ 25 mA
Fibre-optic length	≤ 15 m
Number of channels	8 digital inputs acc. to EN 61131-2
Input voltage	20...29 VDC via operating voltage
Düşük seviye sinyal gerilimi	-3...5 VDC (EN 61131-2, type 2)
Yüksek seviye sinyal gerilimi	11...30 VDC (EN 61131-2, type 2)
Giriş gecikmesi	3 ms
Maks. giriş akımı	6 mA
Number of channels	8 digital outputs acc. to EN 61131-2
Çıkış voltajı	Yük geriliminden 20...29 VDC
Kanal başına çıkış akımı	0.5 A, short-circuit proof
Yük tipi	resistive, inductive, lamp load
Anahtarlama frekansı	≤ 500 Hz
Eşzamanlılık faktörü	1
Boyutlar (W x L x H)	30 x 126 x 26.5 mm
Titreşim testi	EN 60068-2-6 uyarınca
Darbe testi	acc. to DIN EN 60068-2-27
Elektromanyetik uyumluluk	EN 61000-6-2/EN 61000-6-4 uyarınca
IP Derecesi	IP67
Onaylar	CE, cULus

LEDs

	LED designation	Status green	Status red	Function
IP-Link / module status	RUN / ERR (I/O)	flickers/ON	OFF	Receiving error-free IP-Link protocols
		flickers	flickers	Receiving faulty IP-Link protocols
		OFF	flickers	Receiving faulty IP-Link protocols / system fault
		OFF	ON	No receipt of IP-Link protocols / module error
Inputs	1...8	OFF		Input inactive (not dampened)
		ON		Input active (dampened)
Outputs	1...8	OFF		Output inactive (not switched)
		ON		Output active (switched)
Power supply	U _B	OFF		Operating voltage U _B < 18 VDC
		ON		Operating voltage U _B ≥ 18 VDC
	U _L	OFF		Load voltage U _L < 18 VDC
		ON		Load voltage U _L ≥ 18 VDC

Data in process image

			Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
PROFIBUS-DP coupling module: "Byte alignment" is disabled (default) and the previous byte has been used halfway. DeviceNet™, CANopen, INTERBUS, Ethernet coupling module: Byte n has been used halfway. Up to 8 bit input data and output data each are mapped.	Input	Byte n	C0P4	C0P3	C0P2	C0P1	Is used by the physically preceding bit-oriented extension module connected via the IP Link.			
	Output	Byte n	C1P4	C1P3	C1P2	C1P1				
	Input	Byte n+1	Is used by the physically following bit-oriented extension module connected via the IP Link.				C0P8	C0P7	C0P6	C0P5
	Output	Byte n+1					C1P8	C1P7	C1P6	C1P5
PROFIBUS-DP coupling module: "Byte alignment" is disabled (default) and the previous byte has been completely used or "byte alignment" is activated. DeviceNet™, CANopen, INTERBUS, Ethernet coupling module: The previous byte has been completely used. Up to 8 bit input data and output data each are mapped.	Input	Byte n	C0P8	C0P7	C0P6	C0P5	C0P4	C0P3	C0P2	C0P1
	Output	Byte n	C1P8	C1P7	C1P6	C1P5	C1P4	C1P3	C1P2	C1P1
C... = Connector no. – P... = Pin no.										

Accessories

Type	Ident no.	housing	clamping point	clamping range	signal LEDs	degree of protection
SNNE-BL I/O 3,5-10/LED-SET	6824475	1-row	10	0,5...1,5 mm ²	yes	IP20
SNNE-BL I/O 3,5-30/LED-SET	6824474	3-row	30	0,5...1,5 mm ²	yes	IP20