
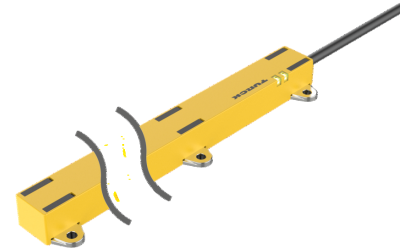


LI200P1-Q17LM1-LIU5X2

Inductive Linear Position Sensor

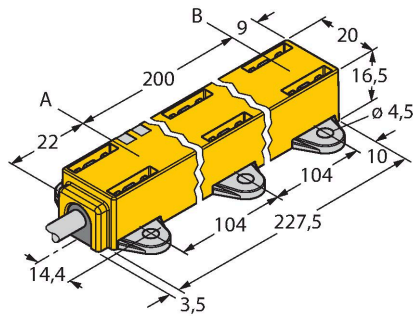


Technical data

Type	LI200P1-Q17LM1-LIU5X2
ID	1590732
Measuring principle	Inductive
General data	
Measuring range	200 mm
Resolution	0.049 mm/12 bit
Nominal distance	1.5 mm
Blind zone a	22 mm
Blind zone b	9 mm
Repeat accuracy	≤ 0.03 % of full scale
Linearity deviation	≤ 0.5 % f.s.
Temperature drift	≤ ± 0.01 %/K
Hysteresis	not applied
Electrical data	
Operating voltage U _s	15...30 VDC
Ripple U _{ss}	≤ 10 % U _{Bmax}
Isolation test voltage	0.5 kV
Short-circuit protection	yes
Wire break/reverse polarity protection	yes/yes (voltage supply)
Output function	4-wire, Analog output
Voltage output	0...10 V
Current output	4...20 mA
Load resistance voltage output	≥ 4.7 kΩ
Load resistance current output	≤ 0.4 kΩ
Sample rate	700 Hz
Current consumption	< 50 mA

Features

- Rectangular, plastic
- Many mounting possibilities
- Positioning element P1-Li-QR14/Q17L, mounting aids M1.1-Q17L and M1.2-Q17L included in delivery
- LED indicates measuring range
- Immune to electromagnetic interference
- Extremely short blind zones
- Resolution, 12-bit
- 4-wire, 15...30 VDC
- Analog output
- Programmable measuring range
- 0...10 V and 4...20 mA
- Cable connection

Wiring diagram

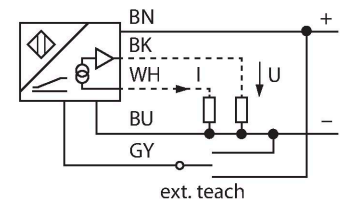


Functional principle

The measuring principle of linear position sensors is based on RLC coupling between the positioning element and the sensor, whereby an output signal is provided proportional to the position of the positioning element. The rugged sensors are wear and tear-free, thanks to the contactless operating principle. They convince through their excellent repeatability, resolution and linearity within a broad temperature range. The innovative technology ensures a high immunity to electromagnetic DC and AC fields.


Technical data

Mechanical data	
Design	Profile, Q17L
Dimensions	231 x 20 x 16.5 mm
Housing material	Plastic, PC-GF10
Electrical connection	Cable
Cable quality	Ø 5.2 mm, Black, LiYY, PVC, 2 m
Core cross-section	5 x 0.25 mm ²
Environmental conditions	
Ambient temperature	-25...+70 °C
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP67
MTTF	138 years acc. to SN 29500 (Ed. 99) 40 °C
Power-on indication	LED, Green
Measuring range display	multifunction LED, green
Included in delivery	positioning element P1-Li-QR14/Q17L, M1.1-Q17L, M1.2-Q17L
UL certificate	E210608

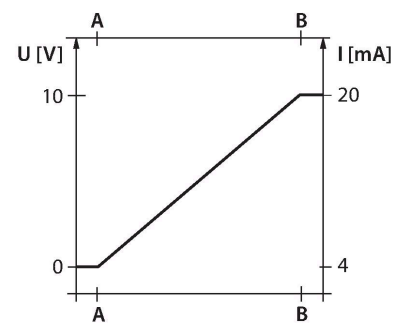

Mounting instructions

Mounting instructions/Description

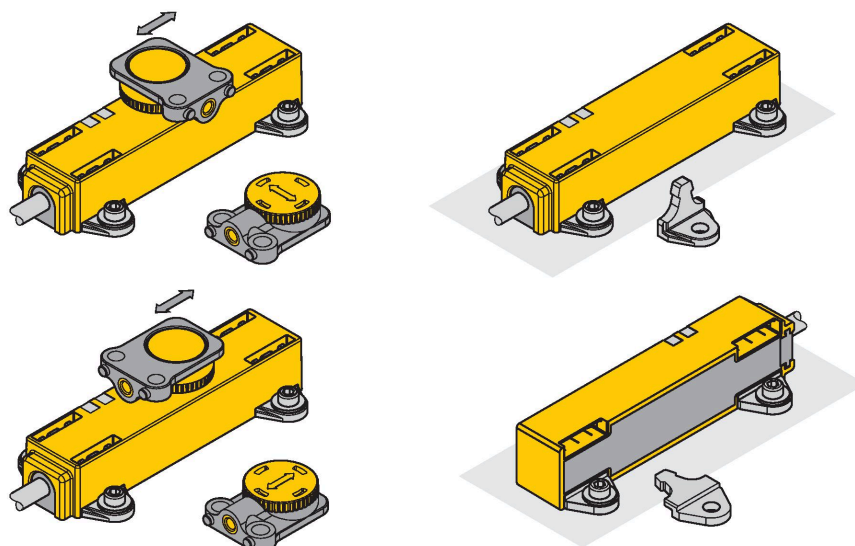

Extensive mounting accessories provide various options for installation. The positioning element can be mounted offset by 90°, thereby providing optimal mounting flexibility. The linear position sensor can also be safely and easily mounted offset by 90° using the two versions of the provided fastening units. The measuring principle of RLC coupling makes the sensor immune to magnetized ferrous chips and other interference fields.

Status display via LED

Green:

Sensor is supplied properly

Measuring range display via LED

Green:

Positioning element is within the measuring range

Green flashing:

Positioning element is within the measuring range, low signal quality (e.g. distance too great)

Off:

Positioning element is outside the detection range

Teaching


The start and end point of the measuring range are set by pressing the button on the teach adapter. Moreover there is the possibility of inverting the course of the output curve.

Bridge pin 5 and pin 1 for 10 s (UB) = factory setting
Bridge pin 5 and pin 3 for 10 s (GND) = factory setting inverted
Bridge pin 5 and pin 3 for 2 s (GND) = sets start value of measuring range
Bridge pin 5 and pin 1 for 2 s (UB) = sets end value of measuring range

Accessories


P1-LI-QR14/Q17L1590724

Floating positioning element for linear position sensors LI-QR14 and LI-Q17L; transverse and longitudinal mounting possible; the nominal distance to the sensor is 1.5 mm; pairing with the linear position sensor at a distance of up to 3 mm or a misalignment tolerance of up to 3 mm

Technical drawing of the P1-LI-QR14/Q17L floating positioning element. It shows a cylindrical component with a yellow top ring. Dimensions include a diameter of 20 mm for the top ring, a diameter of 4.8 mm for the base, a height of 9 mm, a base diameter of 15 mm, and a total length of 29 mm. An M4 thread is indicated at the base.


M1.1-Q17L1590749

Mounting bracket for linear position sensors LI-Q17L; material: aluminum; 3 pcs. per bag

Technical drawing of the M1.1-Q17L mounting bracket. It shows a small L-shaped bracket. Dimensions include a hole diameter of 4.5 mm, a hole-to-hole distance of 5.5 mm, a hole-to-edge distance of 10.6 mm, and a bracket thickness of 2.5 mm.


M1.2-Q17L1590750

Mounting foot for linear position sensors LI-Q17L; material: aluminum; 3 pcs. per bag

Technical drawing of the M1.2-Q17L mounting foot. It shows a small L-shaped bracket. Dimensions include a hole diameter of 4.5 mm, a hole-to-hole distance of 5 mm, a hole-to-edge distance of 10.6 mm, and a bracket thickness of 2.5 mm.

RMT-Q17L1590755

Removal tool for mounting elements for linear position sensors LI-Q17L

Technical drawing of the RMT-Q17L removal tool. It shows a rectangular tool with a notch. Dimensions include a length of 30 mm, a width of 15 mm, a notch width of 5.6 mm, a notch depth of 5 mm, and a total height of 3 mm.