


WL50-3TW W/30

LED Spotlight – In the Plastic Housing

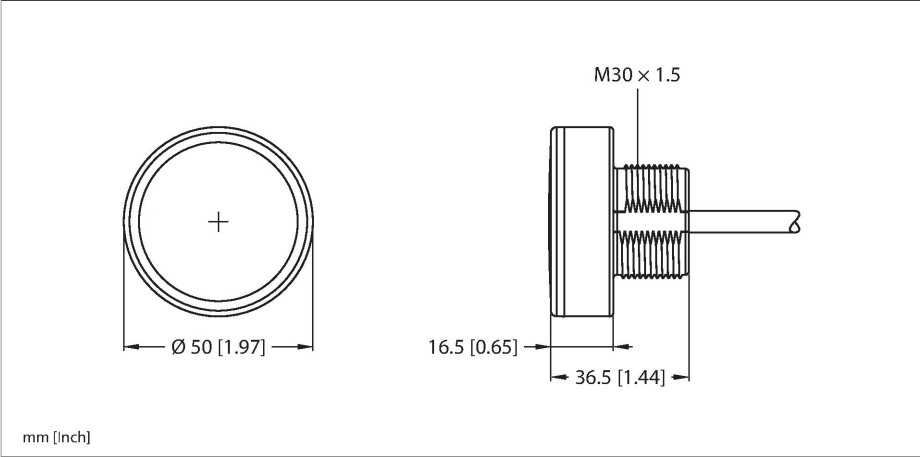

Technical data

Type	WL50-3TW W/30
ID	3810668
Signal and display data	
Purpose	LED work light
Function	Spotlight
Light type	White
Color temperature	4700...+5300 K
Luminous flux lumen	300 lm
LED service life (L70)	50000 h
Dimmable	PWM
Electrical data	
Operating voltage U_B	12...30 VDC
DC rated operating current I_o	≤ 100 mA
Input power	2.4 W
Mechanical data	
Cascadable	No
Design	Cylinder, threaded, WL50-2
Dimensions	Ø 50 x 47.5 mm
Housing material	Plastic, PC
Window material	Plastic, clear
Electrical connection	Cable, 9 m, PVC
Ambient temperature	-40...+50 °C
Protection class	IP67 IP69K
Tests/approvals	
Approvals	CE, UL

Features

- For illuminating workstations, control cabinets or machines
- Homogeneous lighting at close range
- Capacitive button for activation
- For PWM dimming, use capacitive button LC15T-127AP1RBGQP
- Operating voltage 12...30 VDC
- Protection classes IP67/IP69K
- Light color: Daylight white
- Color temperature: 5000 K (± 300 K)
- High luminous flux: 300 lm
- Low power consumption: 2.4 W
- Cable, 9 m
- LC15T-127AP1RBGQP capacitive button not included in delivery

Wiring diagram



Functional principle

These high-intensity work lights are specially designed for illuminating workstations, control cabinets and machines. Power consumption is less than 3 watts with an efficiency of 125 lumens per watt. Devices are available in the standard variant, with activation via voltage supply of the connected cable, or in the touch variant, with activation via a capacitive button on the front. This capacitive button can be used to increase or decrease the light intensity of the lights by increments of 10 %. In addition, it is possible to control the light intensity continuously via a PWM signal. This would be possible via the capacitive button LC15T-127AP1RBGQP or a PWM output

signal of a controller or of suitable sensors.
In addition, both variants are available for flat mounting or mounting on a 30-mm base.

Accessories

FLX18-FM30


3084746

Gooseneck, 457 mm long, M30 thread for cable and plug models of the WL50 and LED ... S50L series, foot with 3 drill holes

FLX18-DM30

3085775

Gooseneck, 457 mm long, M30 thread for cable and plug models of the WL50 and LED ... S50L series, foot with 2 1/4"-20W drill holes



FLX18-12M30


3084748

Gooseneck, 457 mm long, M30 thread for cable and plug models of the WL50 and LED ... S50L series, foot with 1/2"-14 NPSM thread

SMB30A

3032723


Mounting bracket, rectangular, stainless steel, for sensors with 30mm thread



SMB30SC

3052521

Mounting bracket, PBT black, for sensors with 30 mm thread, rotatable



SMB30MM

3027162

Mounting bracket, rectangular, stainless steel, for sensors with 30 mm thread, wide holes for accurate alignment

